


Tehnički list za artikl: LILE0132--

Novia R 450 17/22/30W 3000/4000K Ra90 UGR19 on/off white

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 17W=2200lm / 22W=2900lm / 30W=3880lm@4000K, 129lm/W@4000K, Ø-450mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--



Krivulja raspodjele svjetla




Tehnički podaci

Neto visina (mm)	79,00
Neto promjer (mm)	450,00
Neto masa (kg)	3,98
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

Način montaže	Zidna nadgradna svjetiljka Stropna nadgradna
Boja	bijela RAL 9016
Materijal	PMMA Aluminij
Faktor zasjenjivanja	19
Radni napon AC (V)	220-240
Radni napon DC (V)	216 260 240 186
Efikasnost sustava (lm/W)	129
Snaga (W)	22 17 30
Boja svjetla	Neutralno bijela Toplo bijela
Temperatura boje (K)	4000 3000
Faktor uzvrata boje	90
Svjetlosni tok (lm)	2900 3880 2200
Životni vijek	50000
Klasa zaštite	I
IP stupanj zaštite	IP20
Energetska klasa	D
Otpornost na udarce	IK06
Promjer (mm)	450
ØxV mm	450x79

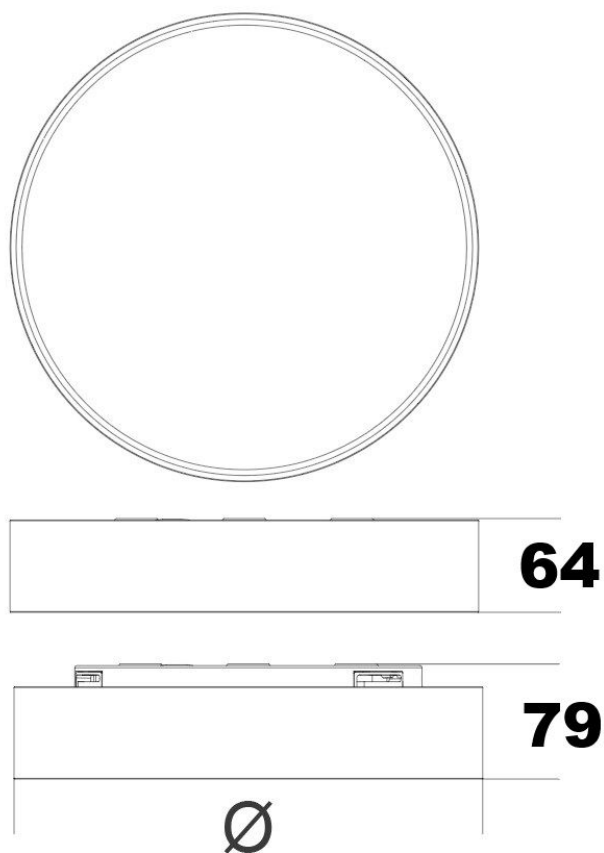Mjerne skice: Nova R 450 17/22/30W 3000/4000K Ra90 UGR19 on/off white

OPIS	KAT. BROJ
Nova R 450 17/22/30W 3000/4000K Ra90 UGR19 on/off white	
Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 17W=2200lm / 22W=2900lm / 30W=3880lm@4000K, 129lm/W@4000K, Ø-450mm H=64/79mm. Articelnumber of the DALI-Module:	LILE0132
LILE0136--	