


Tehnički list za artikl: LILE0134--

Novia R 600 38/55W 3000/4000K Ra90 UGR19 on/off white

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 38W=5000lm / 55W=7000lm@4000K, 127lm/W@4000K, Ø-600mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--



Krivulja raspodjele svjetla




Tehnički podaci

Neto visina (mm)	79,00
Neto promjer (mm)	600,00
Neto masa (kg)	6,00
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

Način montaže	Zidna nadgradna svjetiljka
	Stropna nadgradna
Boja	bijela RAL 9016
Materijal	PMMA Aluminij
Faktor zasjenjivanja	19
Radni napon AC (V)	220-240
Radni napon DC (V)	216
	260
	240
	186
Efikasnost sustava (lm/W)	127
Snaga (W)	55
	38
Boja svjetla	Neutralno bijela
	Toplo bijela
Temperatura boje (K)	4000
	3000
Faktor uzvrata boje	90
Svjetlosni tok (lm)	7000
	5000
Životni vijek	50000
Klasa zaštite	I
IP stupanj zaštite	IP20
Energetska klasa	D
Otpornost na udarce	IK06
Promjer (mm)	600
ØxV mm	600x79

Mjerne skice: Nova R 600 38/55W 3000/4000K Ra90 UGR19 on/off white

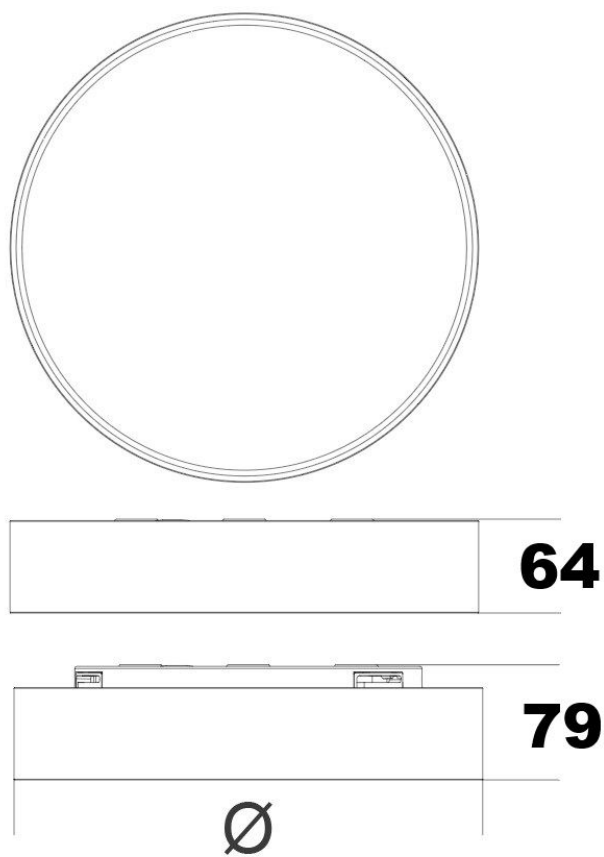

OPIS	KAT. BROJ
Nova R 600 38/55W 3000/4000K Ra90 UGR19 on/off white	
Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 38W=5000lm / LILE0134	
55W=7000lm@4000K, 127lm/W@4000K, Ø-600mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--	