

Tehnički list za artikl: LIVT4855--

6W LED Premium Panel Downlight - okrugli

4000K, 420lm, 120° €CONOMY

including driver, quick connector




Tehnički podaci

(DxŠxV) mm	120x120x25
ØxV mm	120x25
OTVOR mm	Ø110
Boja	bijela
Materijal	PS PMMA Aluminij
Način montaže	Stropna ugradna
Otvor (mm)	Ø110
Snaga (W)	6
Radni napon AC (V)	200-240
Boja svjetla	Neutralno bijela
Svjetlosni tok (lm)	420
Faktor snage	>0.5

Tehnički podaci - nastavak

Faktor uzvrata boje	≥80
Dimabilno	Ne
Temperatura boje (K)	4000
Životni vijek	20.000h
Kut svjetlosti (°)	120°
IP stupanj zaštite	IP20
Klasa zaštite	II
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svjetiljke	LED panel
Izvor svjetla	SMD LED
Grlo	LED Platine
Efikasnost sustava (lm/W)	70
Snaga (W)	6
Frekvencija (Hz)	60
Duljina (mm)	120
Širina (mm)	120
Visina (mm)	25
Promjer (mm)	120

Mjerne skice: 6W LED Premium Panel Downlight - okrugli 4000K, 420lm, 120°

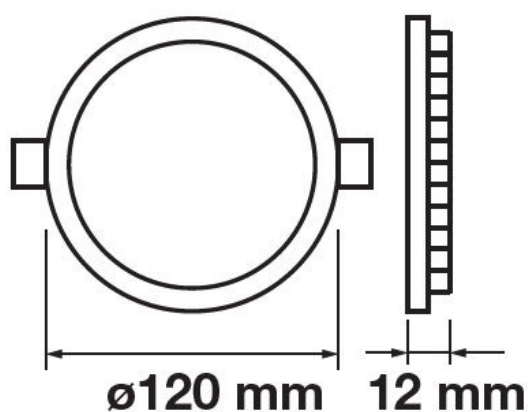

OPIS

KAT. BROJ

6W LED Premium Panel Downlight - okrugli 4000K, 420lm, 120°
including driver, quick connector

LIVT4855