

Tehnički list za artikl: LIVT4860--

18W LED Premium Panel Downlight - okrugli

3000K, 1500lm, 120° **ECONOMY**

including driver, quick connector




Tehnički podaci

(DxŠxV) mm	225x225x25
ØxV mm	225x25
OTVOR mm	Ø210
Boja	bijela
Materijal	PS PMMA Aluminij
Način montaže	Stropna ugradna
Otvor (mm)	Ø210
Snaga (W)	18
Radni napon AC (V)	200-240
Boja svjetla	Toplo bijela
Svjetlosni tok (lm)	1500
Faktor snage	>0.6

Tehnički podaci - nastavak

Faktor uzvrata boje	≥80
Dimabilno	Ne
Temperatura boje (K)	3000
Životni vijek	20.000h
Kut svjetlosti (°)	120°
IP stupanj zaštite	IP20
Klasa zaštite	II
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svjetiljke	LED panel
Izvor svjetla	SMD LED
Grlo	LED Platine
Efikasnost sustava (lm/W)	83
Snaga (W)	18
Frekvencija (Hz)	60
Duljina (mm)	225
Širina (mm)	225
Visina (mm)	25
Promjer (mm)	225

Mjerne skice: 18W LED Premium Panel Downlight - okrugli 3000K, 1500lm, 120°

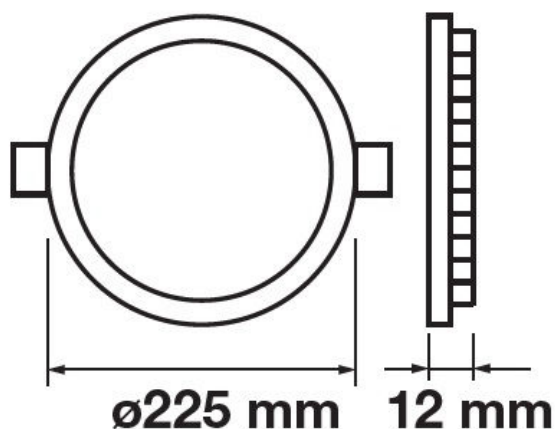

OPIS

KAT. BROJ

18W LED Premium Panel Downlight - okrugli 3000K, 1500lm, 120°
including driver, quick connector

LIVT4860