

Tehnički list za artikl: LIVT4861--

18W LED Premium Panel Downlight - okrugli

4000K, 1500lm, 120° **ECONOMY**

including driver, quick connector




Tehnički podaci

(DxŠxV) mm	225x225x25
ØxV mm	225x25
OTVOR mm	Ø 210
Boja	bijela
Materijal	PS PMMA Aluminij
Način montaže	Stropna ugradna
Otvor (mm)	Ø 210
Snaga (W)	18
Radni napon AC (V)	200-240
Boja svjetla	Neutralno bijela
Svjetlosni tok (lm)	1500
Faktor snage	>0.6

Tehnički podaci - nastavak

Faktor uzvrata boje	≥80
Dimabilno	Ne
Temperatura boje (K)	4000
Životni vijek	20.000h
Kut svjetlosti (°)	120°
IP stupanj zaštite	IP20
Klasa zaštite	II
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	45
Vrsta svjetiljke	LED panel
Izvor svjetla	SMD LED
Grlo	LED Platine
Efikasnost sustava (lm/W)	83
Snaga (W)	18
Frekvencija (Hz)	60
Duljina (mm)	225
Širina (mm)	225
Visina (mm)	25
Promjer (mm)	225

Mjerne skice: 18W LED Premium Panel Downlight - okrugli 4000K, 1500lm, 120°

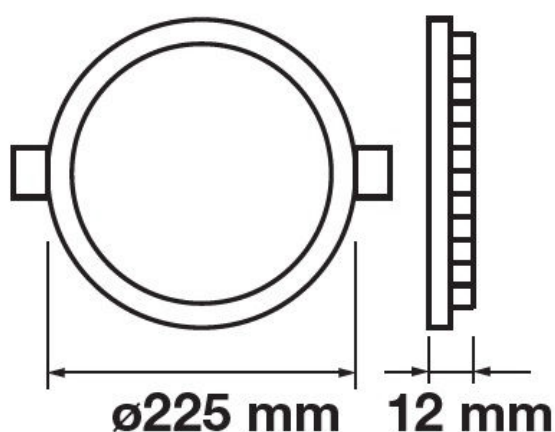

18W LED Premium Panel Downlight - okrugli 4000K, 1500lm, 120°
including driver, quick connector

LIVT4861