

Tehnički list za artikl: MGC52006--

# Strujni transformator 60/5A 21 mm diameter, klasa 1

Ulazna struja 60A, Teret Class 1 (1,25VA)




## Tehnički podaci

|                                |                                                                                                                                                                                                                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP stupanj zaštite             | IP20                                                                                                                                                                                                                                                                               |
| Teret                          | Class 1 (1,25VA)                                                                                                                                                                                                                                                                   |
| Naputak                        | Due to dangerous overvoltage and overheating, the Current Transformer is not allowed to be operated with open secondary Side. (EN 60044-1 /A2) As soon as the Measurement Device, the Energy Counter or the Net Analyzer is disconnected, the secondary Side has to be shortcuted! |
| Namjena korištenja             | for cables up to diameter 21 mm                                                                                                                                                                                                                                                    |
| Norma                          | EN 61869-2                                                                                                                                                                                                                                                                         |
| Otvor (mm)                     | 21                                                                                                                                                                                                                                                                                 |
| <b>Zahtjevi za izolaciju</b>   |                                                                                                                                                                                                                                                                                    |
| Maks. radni napon Um           | 0.72kV r.m.s.                                                                                                                                                                                                                                                                      |
| Ispitni napon izolacije        | 3 kV R.M.S. 50 Hz/ 1 min                                                                                                                                                                                                                                                           |
| Izolacija                      | Class B (EN/IEC 61869-1, 61869-2)                                                                                                                                                                                                                                                  |
| <b>Specifikacije</b>           |                                                                                                                                                                                                                                                                                    |
| Nazivna struja primara Ipr (A) | 60                                                                                                                                                                                                                                                                                 |
| Nazivna frekvencija (Hz)       | 50-60Hz                                                                                                                                                                                                                                                                            |

## Tehnički podaci - nastavak

|                                                                |                                                                                                                                                                                   |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Kratkotrajna struja $I_{th}$                                   | < 60I <sub>pr</sub>                                                                                                                                                               |
| <b>Thermal rated continuous current according to EN60044-1</b> |                                                                                                                                                                                   |
| Nazivna dinamička struja $I_{dyn}$                             | 2.5I <sub>th</sub>                                                                                                                                                                |
| Nazivna struja sekundara $I_{sr}$                              | 5A                                                                                                                                                                                |
| MOment pritezanja (Nm)                                         | 2                                                                                                                                                                                 |
| Materijal kućišta                                              | Polycarbonate, self-extinguishing                                                                                                                                                 |
| <b>Klase točnosti</b>                                          |                                                                                                                                                                                   |
| Referentna temperatura (°C)                                    | 23°C ±1°C                                                                                                                                                                         |
| Greška struje opterećenja                                      | For class 1 and 20% I <sub>n</sub> : ±1.5%<br>For class 1 and 5% I <sub>n</sub> : ±3%.<br>For class 1 and 100% I <sub>n</sub> : ±1%.<br>For class 1 and 120% I <sub>n</sub> : ±1% |
| <b>Radni uvjeti</b>                                            |                                                                                                                                                                                   |
| Temperaturno područje - Transport/Skladištenje (°C)            | -25 to +60                                                                                                                                                                        |
| Temperaturno područje - Pogon (°C)                             | -5 to +40                                                                                                                                                                         |

## Maßbild MGC52006--

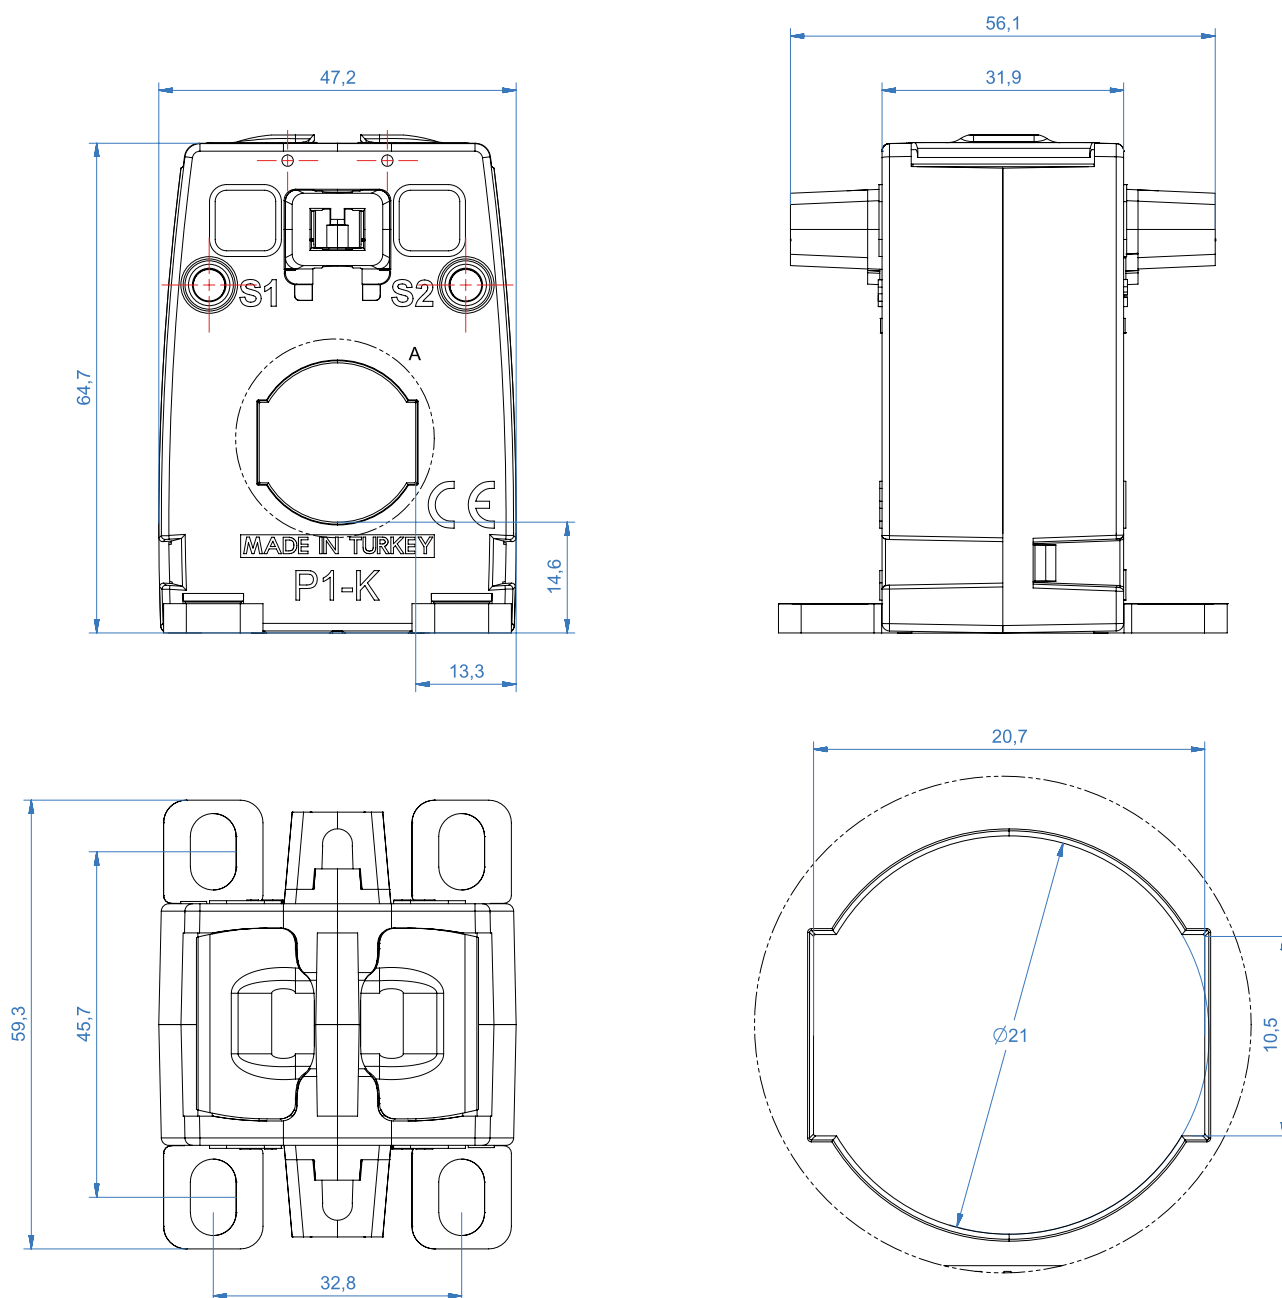

### OPIS

Strujni transformator 60/5A 21 mm diameter, klasa 1  
Ulazna struja 60A, Teret Class 1 (1,25VA)

### KAT. BROJ

MGC52006