

Tehnički list za artikl: NL91000022

EX-izvedba panike ZONA1 /Ijevo/zidna LED CPS 230VAC/DC IP66

arrow left, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm



Tehnički podaci

Neto duljina (mm)	356,00
Neto visina (mm)	175,00
Neto dubina (mm)	76,00
Neto masa (kg)	2,00
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Standard
Izvedba/tip	Ex-panik svjetiljka
Dizajn	EXIT
Boja	siva
Područje detekcije (m)	25
Rasvjetno tijelo	LED (3W)
Lumen	106
Područje napona (V)	110-277V AC; 110-250V DC
IP stupanj zaštite	IP66
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

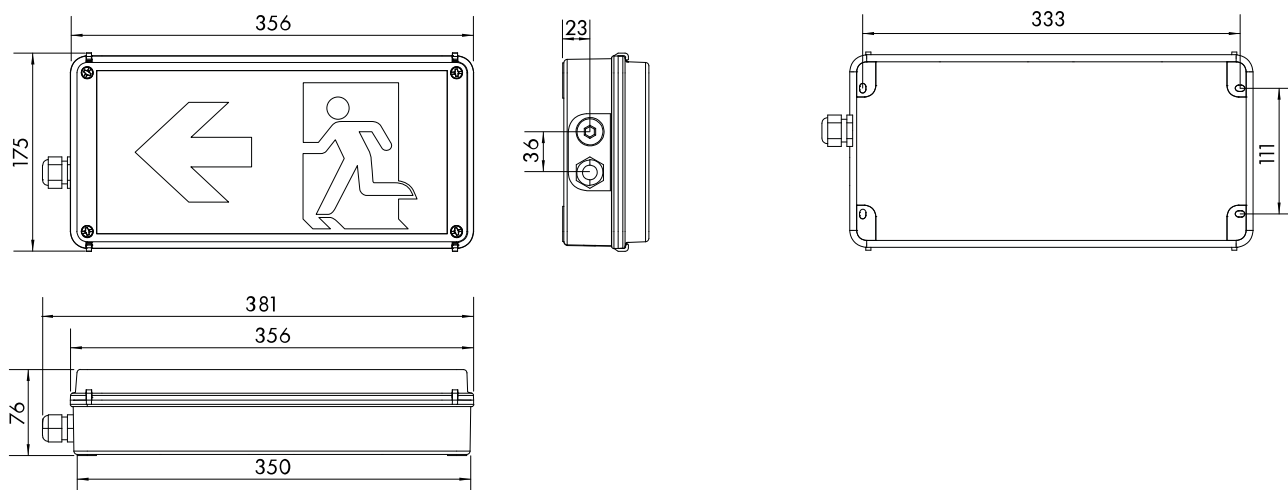


Tabela artikla

OPIS	KAT. BROJ
EX-izvedba panike ZONA1 /ljevo/zidna LED CPS 230VAC/DC IP66	NL91000022
arrow left, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm	
Dodatni pribor	
Upravljački modul opće rasvjete za CPS MIX- mod; 4-200VA	NLMU05
KUĆIŠTE IP65 SA MU05 MODULOM ZA OPĆU RASVJETU	NLMU05BOX
176x125x82 mm (LxHxD)	