

Tehnički list za artikl: NL91000023

EX-izvedba panike ZONA1 /ravno/zidna LED CPS 230VAC/DC IP66

arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm



Tehnički podaci

Neto duljina (mm)	356,00
Neto visina (mm)	175,00
Neto dubina (mm)	76,00
Neto masa (kg)	2,00
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Standard
Izvedba/tip	Ex-panik svjetiljka
Dizajn	EXIT
Boja	siva
Pictogram	Pictogram in accordance with ISO 7010 already affixed at the factory
Područje detekcije (m)	25
Rasvjetno tijelo	LED (3W)
Lumen	106
Područje napona (V)	110-277V AC; 110-250V DC
IP stupanj zaštite	IP66
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

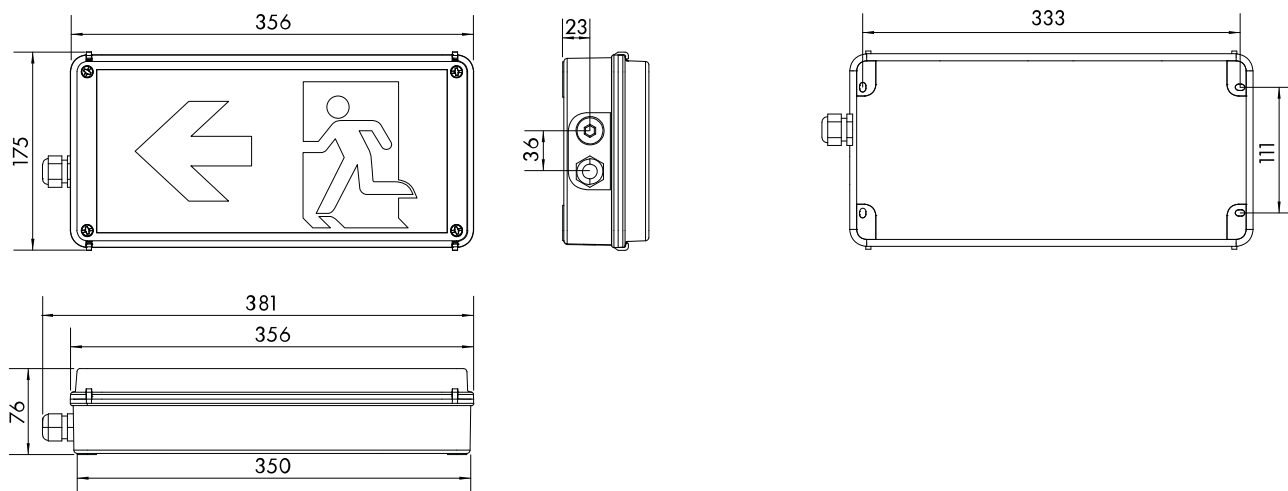


Tabela artikla

OPIS	KAT. BROJ
EX-izvedba panike ZONA1 /ravno/zidna LED CPS 230VAC/DC IP66 arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm	NL91000023
Dodatni pribor	
Upravljački modul opće rasvjete za CPS MIX- mod; 4-200VA	NLMU05
KUĆIŠTE IP65 SA MU05 MODULOM ZA OPĆU RASVJETU 176x125x82 mm (LxHxD)	NLMU05BOX