


Tehnički list za artikl: NLAIRE09EL

Svjet.design AI LED kao inox 230VAC/ DC, montaža u zid

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm

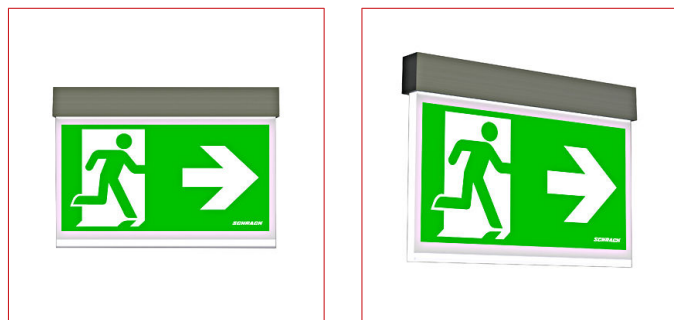

Tehnički podaci


Neto duljina (mm)	167,00
Neto širina (mm)	57,00
Neto visina (mm)	118,00
Neto masa (kg)	0,80
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Plosnate svjetiljke
Dizajn	AI
Boja	Inox - optika
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	15
Rasvjetno tijelo	LED (1.5W)
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
IP stupanj zaštite	IP40
Udarna čvrstoća	≥ IK03
Način montaže	Zidna ugradna

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLAIR.09EL

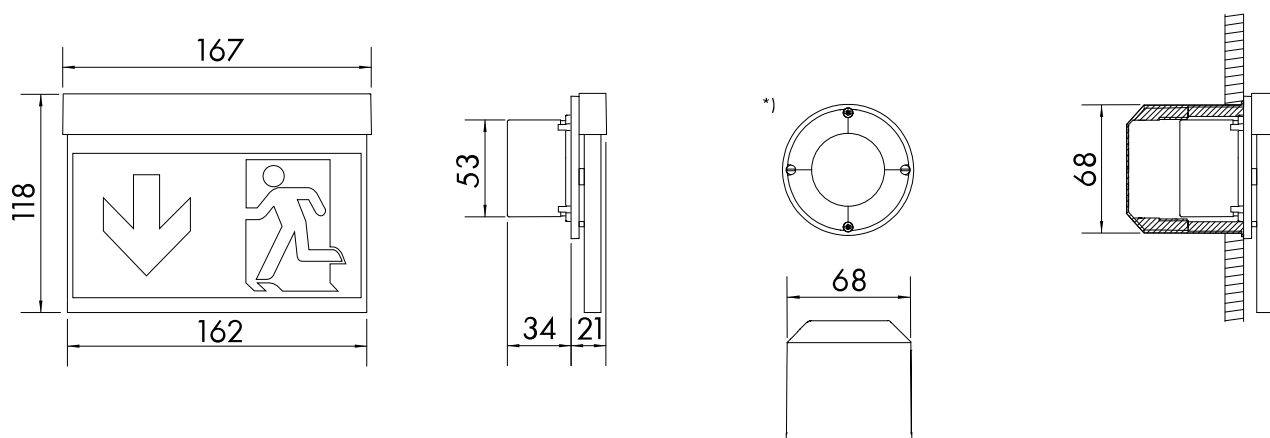

OPIS	KAT. BROJ
Svjet.design AI LED kao inox 230VAC/DC, montaža u zid	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, LED, recessed mounting with adapter frame in switch box Ø68mm	NLAIRE09EL