


Tehnički list za artikl: NLAIRW09EL

# Svjet.design AI LED bijela 230VAC/DC, montaža u zid

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in switch box Ø68mm

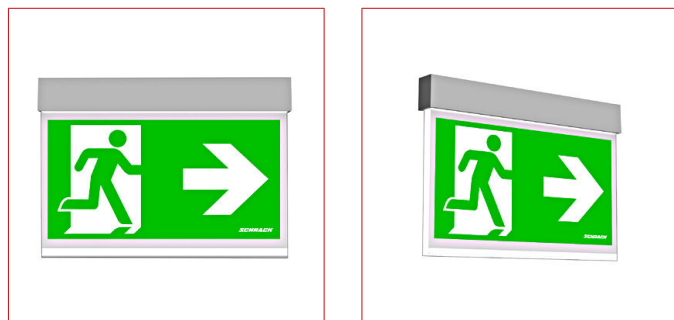

## Tehnički podaci


|                               |                                                                                                                                 |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto duljina (mm)             | 167,00                                                                                                                          |
| Neto širina (mm)              | 57,00                                                                                                                           |
| Neto visina (mm)              | 118,00                                                                                                                          |
| Neto masa (kg)                | 0,80                                                                                                                            |
| Vrsta svjetiljke              | Panik svjetiljka                                                                                                                |
| VB-CPS                        | Za centralni panik sustav (CPS)                                                                                                 |
| Funkcija                      | Sa centralnim nadzorom                                                                                                          |
| Izvedba/tip                   | Plosnate svjetiljke                                                                                                             |
| Dizajn                        | AI                                                                                                                              |
| Boja                          | RAL 9003 (bijela)                                                                                                               |
| Pictogram                     | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Područje detekcije (m)        | 15                                                                                                                              |
| Rasvjetno tijelo              | LED (1.5W)                                                                                                                      |
| Područje napona (V)           | 230V AC 50Hz ±20%; 230V DC ±20%                                                                                                 |
| Power maintained mode (W)     | 2,25                                                                                                                            |
| Power non-maintained mode (W) | 0,70                                                                                                                            |
| Power max. (W)                | 2,25                                                                                                                            |
| IP stupanj zaštite            | IP40                                                                                                                            |
| Udarna čvrstoća               | ≥ IK03                                                                                                                          |
| Način montaže                 | Zidna ugradna                                                                                                                   |

## Tehnički podaci - nastavak

|                                |         |
|--------------------------------|---------|
| Min. temperatura okoline (°C)  | -5      |
| Maks. temperatura okoline (°C) | 40      |
| AA klase E 8101                | AA4     |
| Proizvođač                     | Schrack |

## Dimensions (mm)

NLAIR.09EL

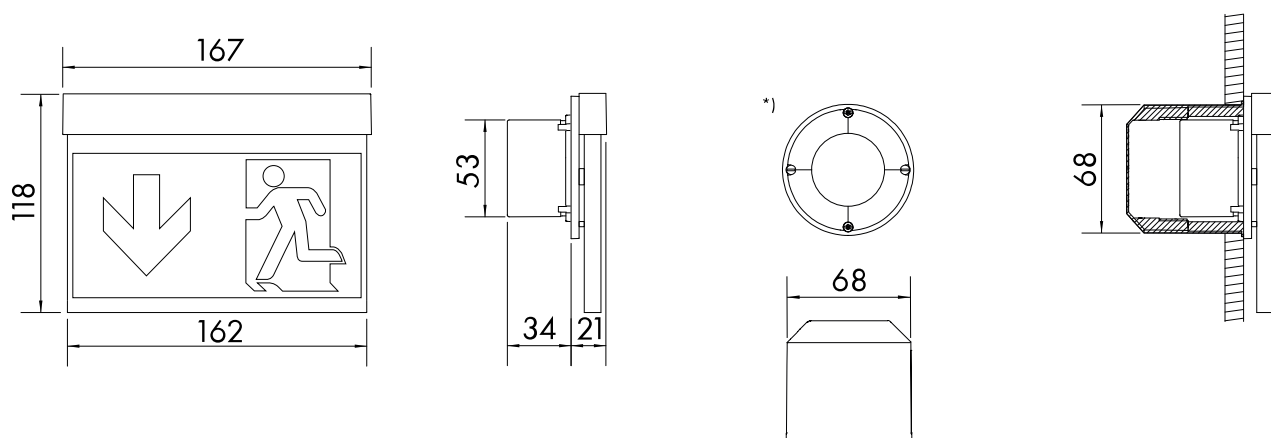

| OPIS | KAT. BROJ |
|------|-----------|
|------|-----------|

Svjet.design AI LED bijela 230VAC/DC, montaža u zid

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in NLAIRW09EL switch box Ø68mm