

Tehnički list za artikl: NLAMWE03SC

Svjet.Desing AM LED SC 230AC kao inox s baterijom 3h na zid

stainless steel look, 1h/3h/8h adjustable



Tehnički podaci

Neto duljina (mm)	241,00
Neto širina (mm)	50,00
Neto visina (mm)	151,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plosnate svjetiljke
Dizajn	AM
Boja	Inox - optika
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMh
IP stupanj zaštite	IP40
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4

Tehnički podaci - nastavak

Proizvođač

Schrack

Dimensions (mm)

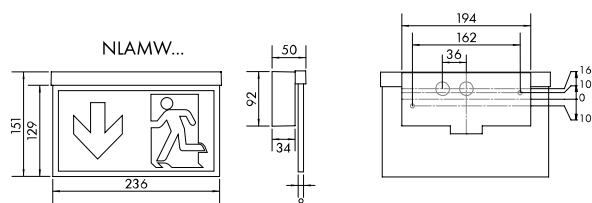


Tabela artikla

OPIS	KAT. BROJ
Svjet.Desing AM LED SC 230AC kao inox s baterijom 3h na zid stainless steel look, 1h/3h/8h adjustable	NLAMWE03SC
Dodatni pribor	
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Kutija za ugradnju u beton svjetiljke design AM/AX	NLAMAXBE
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU ili LEM modul	NLAKKU4820