

Tehnički list za artikl: NLAMWTA09E

Svjet.Desing AM LED EL 230VAC/DC DUO antracit na zid

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Tehnički podaci

Neto duljina (mm)	241,00
Neto širina (mm)	50,00
Neto visina (mm)	151,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Plosnate svjetiljke
Dizajn	AM
Boja	RAL 7016 (antracit)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak

Područje detekcije (m)	20
Rasvjetno tijelo	LED (2W) ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,10
Power non-maintained mode (W)	1,10
Power max. (W)	4,20
IP stupanj zaštite	IP40
Udarna čvrstoća	$\geq IK03$
Način montaže	Zidna nadgradna
Min. temperatura okoline ($^{\circ}\text{C}$)	-5
Maks. temperatura okoline ($^{\circ}\text{C}$)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

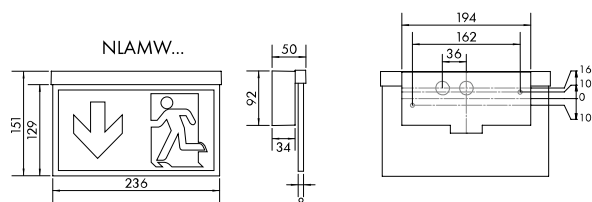

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	0,72	2,95	2,88	4,50	1,90
2,50	0,89	3,34	3,32	5,09	2,10
3,00	1,05	3,68	3,69	5,59	2,28
3,50	1,19	4,03	4,04	6,01	2,42
4,00	1,33	4,25	4,26	6,38	2,53
5,00	1,54	4,69	4,64	6,92	2,60
6,00	1,70	5,02	4,84	7,28	2,40
7,00	1,73	4,94	4,80	7,37	1,86
8,00	1,30	5,19	4,39	7,11	0,96

Tabela artikla

OPIS	KAT. BROJ
Svjet.Desing AM LED EL 230VAC/DC DUO antracit na zid Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLAMWTA09E
Dodatni pribor	
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Površinski adapter za svjetiljke desing AM/AX, boja antracit anthracite, for lateral cable entry	NLAMAXAPAA