

Tehnički list za artikl: NLAMWTW09E

# Svjet.Desing AM LED EL 230VAC/DC DUO bijela na zid

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




## Tehnički podaci

|                   |                                                                                                                                 |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto duljina (mm) | 241,00                                                                                                                          |
| Neto širina (mm)  | 50,00                                                                                                                           |
| Neto visina (mm)  | 151,00                                                                                                                          |
| Neto masa (kg)    | 1,15                                                                                                                            |
| Vrsta svjetiljke  | Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta                                                        |
| VB-CPS            | Za centralni panik sustav (CPS)                                                                                                 |
| Funkcija          | Sa centralnim nadzorom                                                                                                          |
| Izvedba/tip       | Plosnate svjetiljke                                                                                                             |
| Dizajn            | AM                                                                                                                              |
| Boja              | RAL 9003 (bijela)                                                                                                               |
| Pictogram         | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |

## Tehnički podaci - nastavak

|                                                  |                                              |
|--------------------------------------------------|----------------------------------------------|
| Područje detekcije (m)                           | 20                                           |
| Rasvjetno tijelo                                 | LED (2W)<br>ERT-LED (1W)                     |
| Lumen                                            | 140                                          |
| Područje napona (V)                              | 230V AC 50Hz $\pm 20\%$ ; 230V DC $\pm 20\%$ |
| Power maintained mode (W)                        | 3,10                                         |
| Power non-maintained mode (W)                    | 1,10                                         |
| Power max. (W)                                   | 4,20                                         |
| IP stupanj zaštite                               | IP40                                         |
| Udarna čvrstoća                                  | $\geq IK03$                                  |
| Način montaže                                    | Zidna nadgradna                              |
| Min. temperatura okoline ( $^{\circ}\text{C}$ )  | -5                                           |
| Maks. temperatura okoline ( $^{\circ}\text{C}$ ) | 40                                           |
| AA klase E 8101                                  | AA4                                          |
| Proizvođač                                       | Schrack                                      |

## Dimensions (mm)

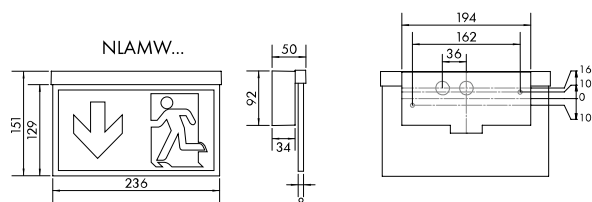

## Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

|  |  |  |  |  |  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 2,00                                                                                | 0,72                                                                                | 2,95                                                                                | 2,88                                                                                | 4,50                                                                                  | 1,90                                                                                  |
| 2,50                                                                                | 0,89                                                                                | 3,34                                                                                | 3,32                                                                                | 5,09                                                                                  | 2,10                                                                                  |
| 3,00                                                                                | 1,05                                                                                | 3,68                                                                                | 3,69                                                                                | 5,59                                                                                  | 2,28                                                                                  |
| 3,50                                                                                | 1,19                                                                                | 4,03                                                                                | 4,04                                                                                | 6,01                                                                                  | 2,42                                                                                  |
| 4,00                                                                                | 1,33                                                                                | 4,25                                                                                | 4,26                                                                                | 6,38                                                                                  | 2,53                                                                                  |
| 5,00                                                                                | 1,54                                                                                | 4,69                                                                                | 4,64                                                                                | 6,92                                                                                  | 2,60                                                                                  |
| 6,00                                                                                | 1,70                                                                                | 5,02                                                                                | 4,84                                                                                | 7,28                                                                                  | 2,40                                                                                  |
| 7,00                                                                                | 1,73                                                                                | 4,94                                                                                | 4,80                                                                                | 7,37                                                                                  | 1,86                                                                                  |
| 8,00                                                                                | 1,30                                                                                | 5,19                                                                                | 4,39                                                                                | 7,11                                                                                  | 0,96                                                                                  |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                    | KAT. BROJ  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Svjet.Desing AM LED EL 230VAC/DC DUO bijela na zid<br>Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm                  | NLAMWTW09E |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                   |            |
| Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                        | NLAMPIKTLO |
| Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                       | NLAMPIKTLU |
| Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                         | NLAMPIKTRO |
| Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM<br>viewing distance: 22m                                                                                                                                                        | NLAMPIKTRU |
| Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010<br>pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB        | NLKS4FIRE  |
| Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010<br>pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB | NLKS4HELP  |
| Površinski adapter za svjetiljke desing AM/AX, boja bijela<br>white, for lateral cable entry                                                                                                                                            | NLAMAXAPAW |