

Tehnički list za artikl: NLAXDE09EL

Svjet.Desing AX LED EL 230VAC/DC kao inox na strop

with supervision - centrally switchable, Viewing distance: 30m, LED, 230V AC/DC



Tehnički podaci

Neto duljina (mm)	317,00
Neto širina (mm)	80,00
Neto visina (mm)	228,00
Neto masa (kg)	1,40
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Plosnate svjetiljke
Dizajn	AX
Boja	Inox - optika
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	30
Rasvjetno tijelo	LED (3W)
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP stupanj zaštite	IP40
Udarna čvrstoća	≥ IK03
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5

Tehnički podaci - nastavak

Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

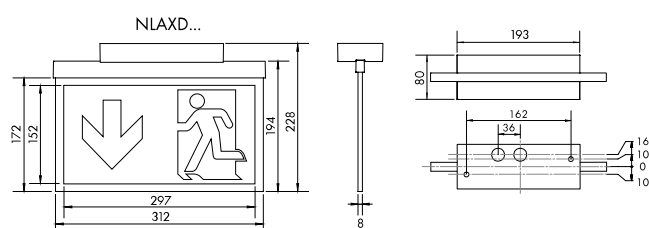


Tabela artikla

OPIS	KAT. BROJ
Svjet.Desing AX LED EL 230VAC/DC kao inox na strop with supervision - centrally switchable, Viewing distance: 30m, LED, 230V AC/DC	NLAXDE09EL
Dodatni pribor	
Površinski adapter za svjetiljke desing AM/AX, boja kao inox stainless steel look, for lateral cable entry	NLAMAXAPAE