

Tehnički list za artikl: NLDLQ023WL

Sig.svjetiljka DLQ 1x1W ERT-LED 3h 230VAC

Wireless krom

Recessed mounting








Tehnički podaci

Neto duljina (mm)	83,00
Neto širina (mm)	83,00
Neto visina (mm)	18,00
Neto masa (kg)	0,80
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Metalna zaštita od udara
Dizajn	DL
Boja	srebrna
Vrijeme autonomije (h)	3
Rasvjetno tijelo	ERT-LED (1W)
Lumen	100
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMh
IP stupanj zaštite	IP20
Način montaže	Stropna ugradna
AA klase E 8101	AA4

Dimensions (mm)

NLDL...

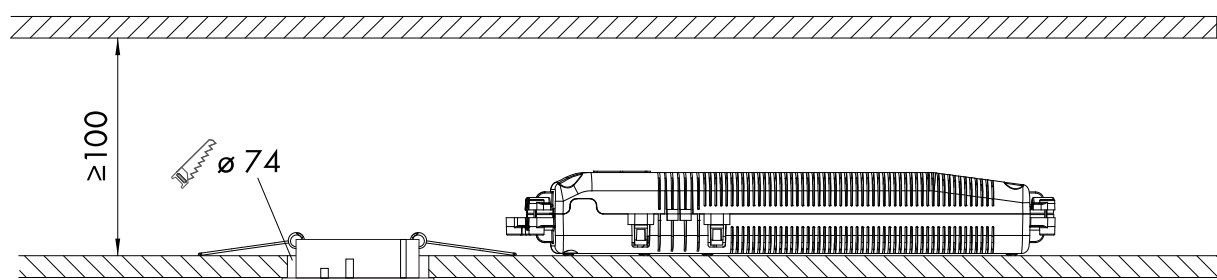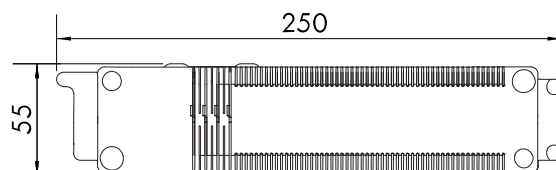

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,00	4,76	6,71	8,61	3,61
2,50	2,10	5,42	7,63	9,87	4,00
3,00	2,10	5,89	8,27	10,96	3,84
3,50	0,74	5,81	8,07	10,37	0,87
4,00	0,00	4,31	7,49	7,84	0,00

Tabela artikla

OPIS	KAT. BROJ
Sig.svjetiljka DLQ 1x1W ERT-LED 3h 230VAC Wireless krom Recessed mounting	NLDLQ023WL
Dodatni pribor	
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU or LEM module	NLAKKU4820
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3