


Tehnički list za artikl: NLFLU010EL

Emergency luminaire FLU 10W LED 230V AC/DC EL floodlight

Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (The monitoring module is installed in the supplied separate housing NLMU06BOX) - centrally switchable, 1900lm

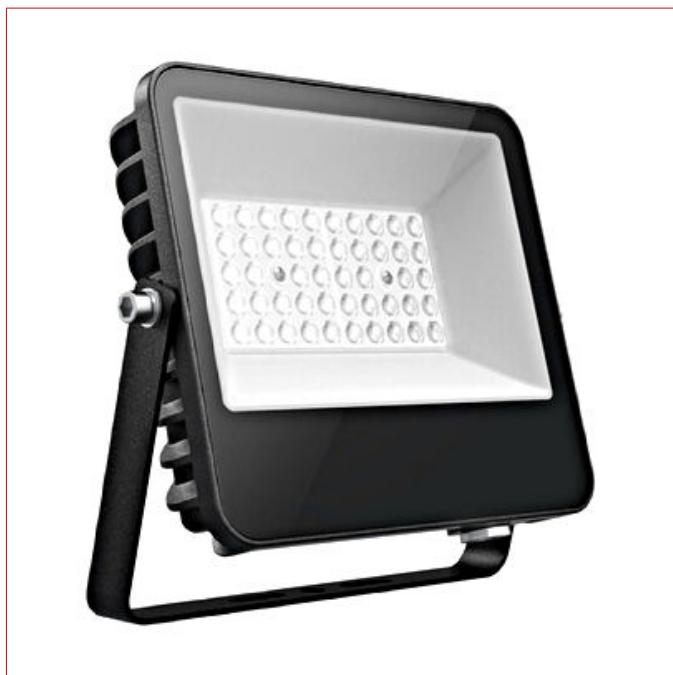

Tehnički podaci


Neto duljina (mm)	175,00
Neto visina (mm)	165,00
Neto dubina (mm)	34,00
Neto masa (kg)	2,10
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Metalna zaštita od udara
Dizajn	FLU
Boja	RAL 7016 (antracit)
Rasvjetno tijelo	LED (10W)
Lumen	1900

Tehnički podaci - nastavak


Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	11,50
Power non-maintained mode (W)	1,50
Power max. (W)	11,50
IP stupanj zaštite	IP66
Udarna čvrstoća	IK08
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	38
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Mjerne skice: Emergency luminaire FLU 10W LED 230V AC/DC EL floodlight

NLFLU010EL

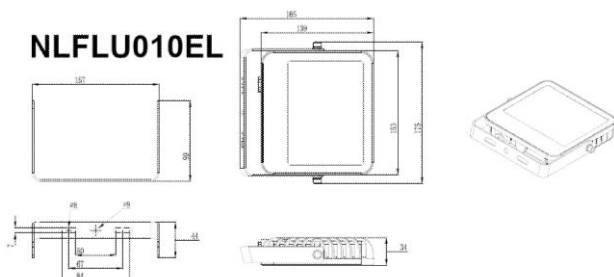

NLMU06BOX

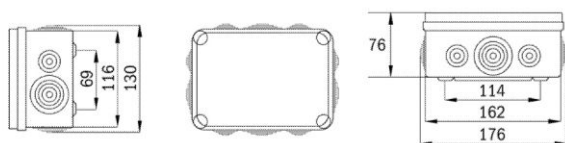

Podatkovna tablica: Emergency luminaire FLU 10W LED 230V AC/DC EL floodlight

					
2,00	2,83	6,25	6,25	6,25	2,83
2,50	3,54	7,81	7,81	7,81	3,54
3,00	4,24	9,38	9,38	9,38	4,24
3,50	4,95	10,94	10,94	10,94	4,95
4,00	5,66	12,5	12,5	12,5	5,66
5,00	6,83	14,95	14,95	14,95	6,83
6,00	7,83	17,01	17,01	17,01	7,83
7,00	8,71	19,21	19,21	19,21	8,71
8,00	9,5	21,25	21,25	21,25	9,5
9,00	10,25	23,12	23,12	23,12	10,25
10,00	10,93	24,83	24,83	24,83	10,93
12,00	12,07	27,95	27,95	27,95	12,07
14,00	12,76	30,74	30,74	30,74	12,76
16,00	13,13	33,13	33,13	33,13	13,13

OPIS	KAT. BROJ
------	-----------

Emergency luminaire FLU 10W LED 230V AC/DC EL floodlight

Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (The monitoring module is installed in the supplied separate housing NLMU06BOX) - centrally switchable, 1900lm

NLFLU010EL