

Tehnički list za artikl: NLFLU030EL

Emergency luminaire FLU 30W LED 230V AC/DC EL floodlight

Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (NLMU06BOX) - centrally switchable, 5116lm





Tehnički podaci

Neto duljina (mm)	198,00
Neto visina (mm)	183,00
Neto dubina (mm)	37,00
Neto masa (kg)	4,70
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Metalna zaštita od udara
Dizajn	FLU
Boja	RAL 7016 (antracit)
Rasvjetno tijelo	LED (30W)
Lumen	5116
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%

Tehnički podaci - nastavak

Power maintained mode (W)	31,50
Power non-maintained mode (W)	1,50
Power max. (W)	31,50
IP stupanj zaštite	IP66
Udarna čvrstoća	IK08
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	38
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Mjerne skice: Emergency luminaire FLU 30W LED 230V AC/DC EL floodlight

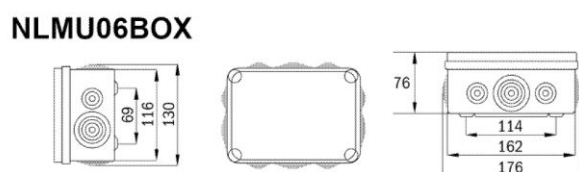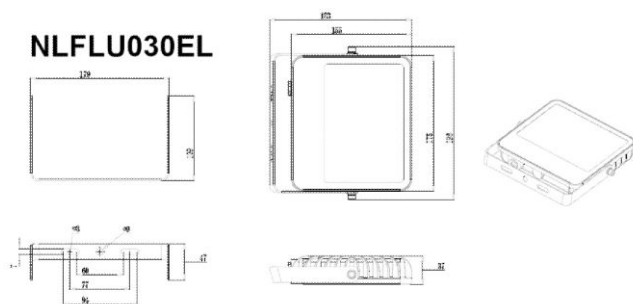

Podatkovna tablica: Emergency luminaire FLU 30W LED 230V AC/DC EL floodlight

					
2,00	2,73	5,7	5,7	5,7	2,73
2,50	3,42	7,12	7,12	7,12	3,42
3,00	4,1	8,55	8,55	8,55	4,1
3,50	4,79	9,97	9,97	9,97	4,79
4,00	5,47	11,4	11,4	11,4	5,47
5,00	6,84	14,25	14,25	14,25	6,84
6,00	8,21	17,1	17,1	17,1	8,21
7,00	9,58	19,95	19,95	19,95	9,58
8,00	10,74	22,53	22,53	22,53	10,74
9,00	11,81	25,01	25,01	25,01	11,81
10,00	12,83	27,4	27,4	27,4	12,83
12,00	14,69	31,89	31,89	31,89	14,69
14,00	16,36	36,03	36,03	36,03	16,36
16,00	17,9	39,83	39,83	39,83	17,9

OPIS	KAT. BROJ
Emergency luminaire FLU 30W LED 230V AC/DC EL floodlight	NLFLU030EL
Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (NLMU06BOX) - centrally switchable, 5116lm	