


Tehnički list za artikl: NLFMWD009M

FM Flexway svjetiljka LED 230V za centralni sustav

Zidna sa mogućnosti izbora PIKTOGRAMA preko ulaznog kontakta

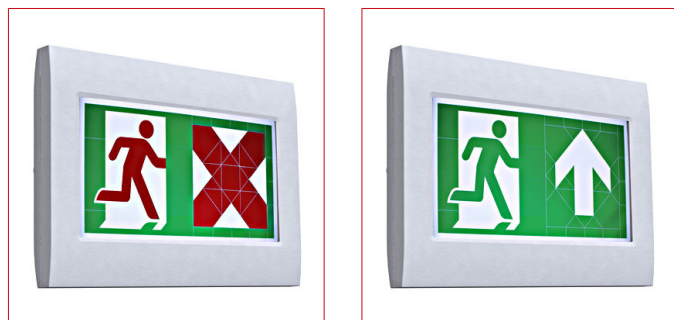


Tehnički podaci

Neto duljina (mm)	262,00
Neto visina (mm)	188,00
Neto dubina (mm)	58,00
Neto masa (kg)	2,00
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	for dynamic escape route management
Izvedba/tip	Metalna zaštita od udara
Dizajn	FM
Boja	RAL 9003 (bijela)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	20
Rasvjetno tijelo	LED (2W)
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	5,40
Power non-maintained mode (W)	2,80
Power max. (W)	5,40
IP stupanj zaštite	IP65
Udarna čvrstoća	IK01
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-5

Tehnički podaci - nastavak


Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

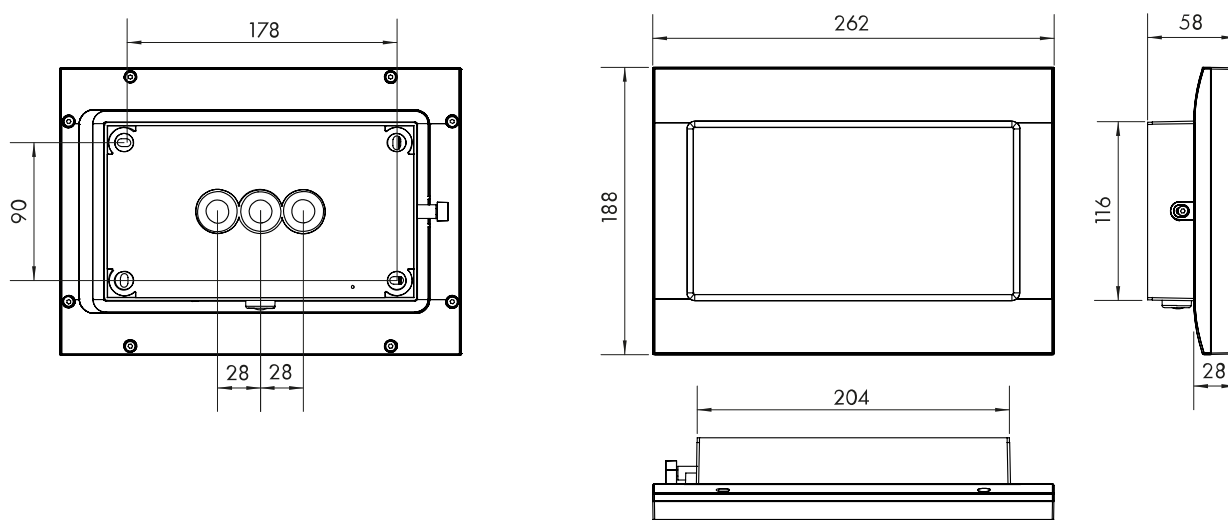

Dimensions accessoires (mm)

NLFMDA

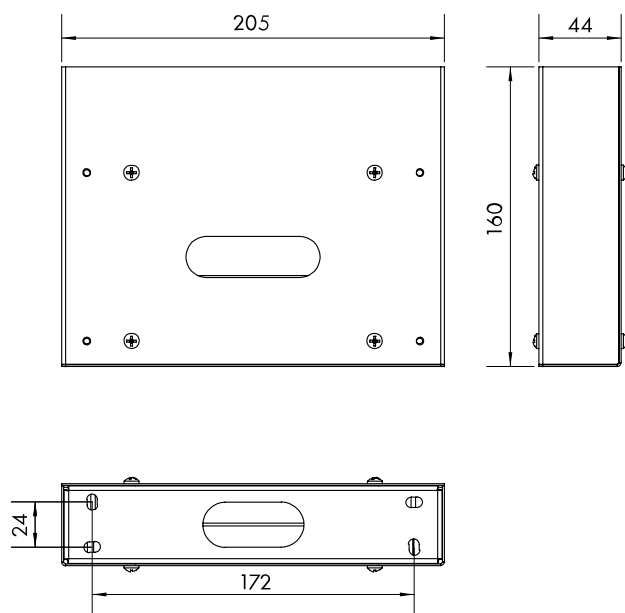

NLFMWA

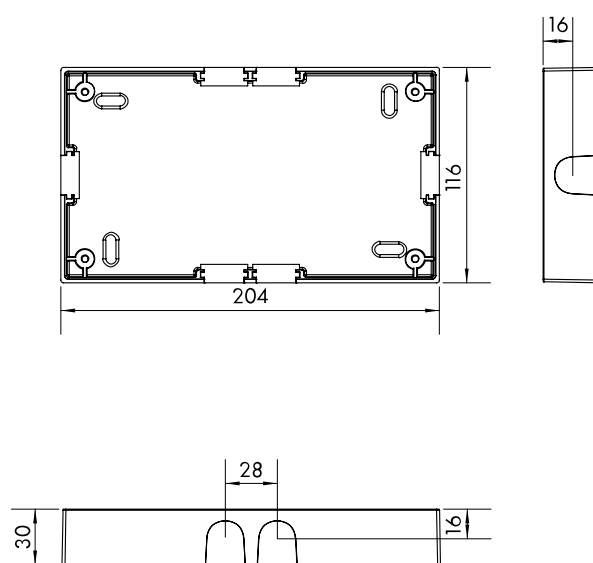


Tabela artikla

OPIS	KAT. BROJ
FM Flexway svjetiljka LED 230V za centralni sustav	NLFMWD009M
Zidna sa mogućnosti izbora PIKTOGRAMA preko ulaznog kontakta	
Dodatni pribor	
Stropna ugradna kutija za svjetiljku Desing FM	NLFMWA001