


Tehnički list za artikl: NLFMWW09EL

Svjetlika FM LED bijela 230V, montaža na zid

Wall surface mounting, with supervision - centrally switchable, rescue sign luminaire, HACCP certified for food industry; viewing distance: 22m

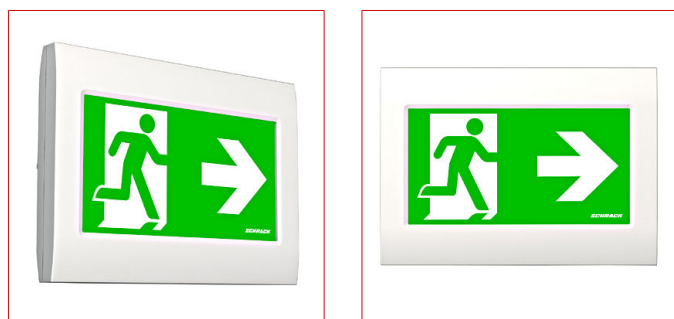

Tehnički podaci

Neto duljina (mm)	262,00
Neto visina (mm)	188,00
Neto dubina (mm)	58,00
Neto masa (kg)	2,00
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Metalna zaštita od udara
Dizajn	FM
Boja	RAL 9003 (bijela)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	22
Rasvjetno tijelo	LED (2W)
Područje napona (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,40
Power non-maintained mode (W)	1,10
Power max. (W)	3,40
IP stupanj zaštite	IP65
Udarna čvrstoća	IK01
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak


AA klase E 8101

AA4

Proizvođač


Schrack

Dimensions (mm)

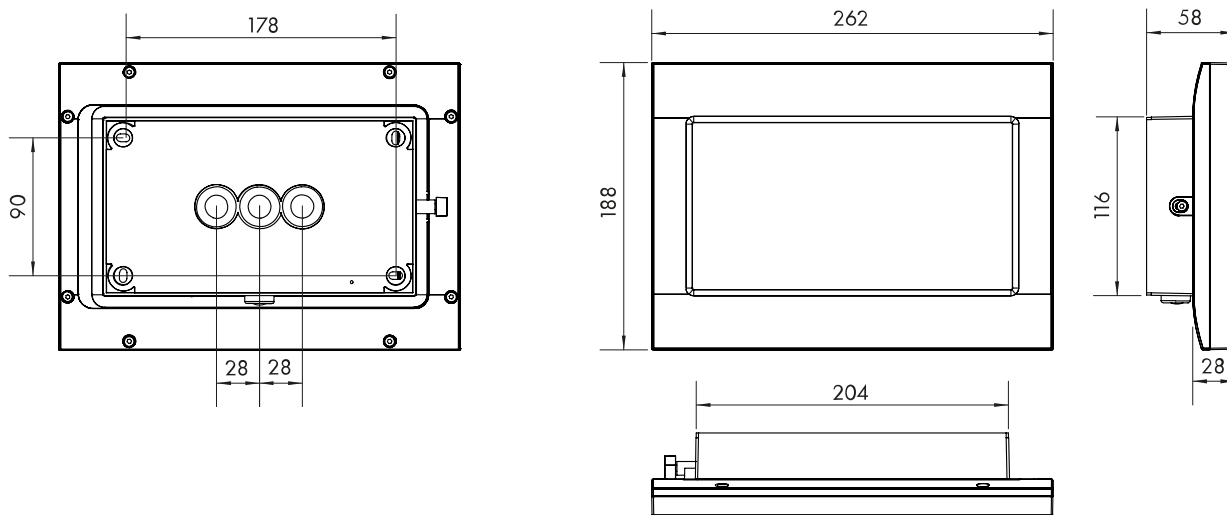

Dimensions accessoires (mm)

NLFMDA

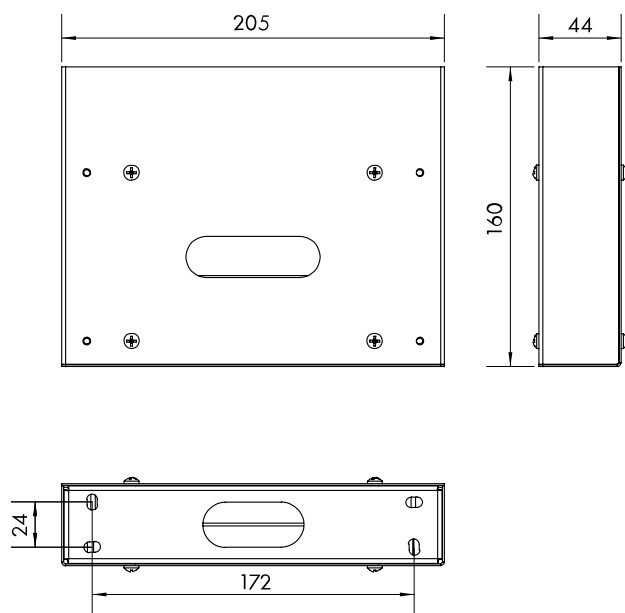

NLFMWA

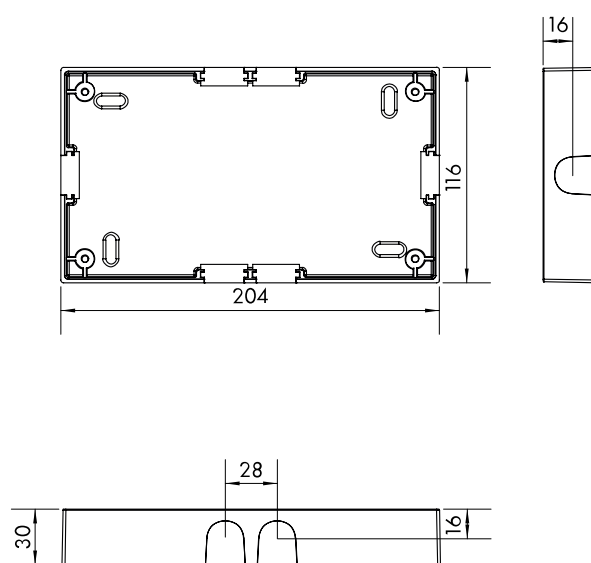


Tabela artikla

OPIS	KAT. BROJ
Svjetlika FM LED bijela 230V, montaža na zid Wall surface mounting, with supervision - centrally switchable, rescue sign luminaire, HACCP certified for food industry; viewing distance: 22m	NLFMWW09EL
Dodatni pribor	
Stropna ugradna kutija za svjetiljku Desing FM	NLFMWA001