




Tehnički list za artikl: NLILDLS23W

IL ERTLED 3h NŽ WL panika, bežično upravljanje, crna

Black, White, surface ceiling mounting, LiFePO₄ battery, emergency luminaire with exchangeable lenses, including lenses for illuminating escape routes or for illuminating round surfaces, central switching, 250lm

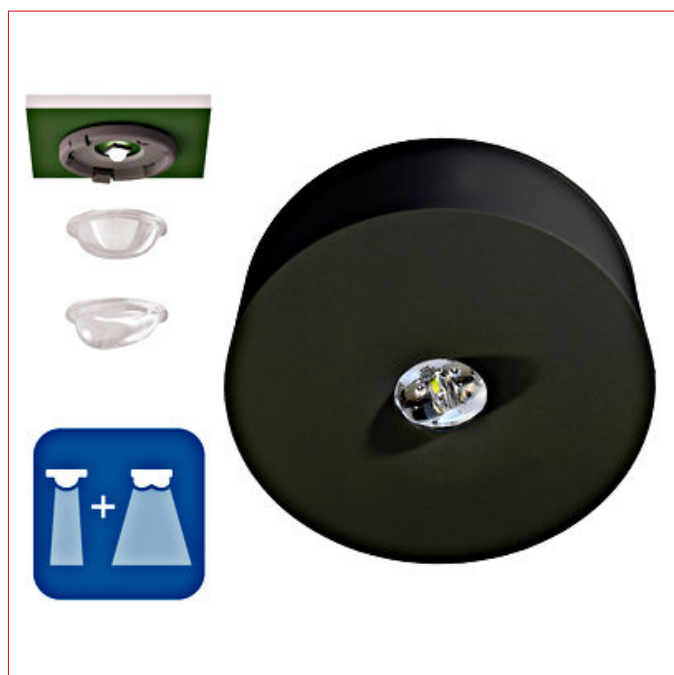


Tehnički podaci

Neto visina (mm)	36,00
Neto promjer (mm)	99,00
Neto masa (kg)	0,25
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Plastične svjetiljke
Dizajn	IL
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)
Vrijeme autonomije (h)	3
Rasvjetno tijelo	ERT-LED (3W)


Tehnički podaci - nastavak

Lumen	250
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	2,30
Power non-maintained mode (W)	0,40
Power max. (W)	3,40
Baterija (V/Ah)	3,2/3,3 LiFePO4
IP stupanj zaštite	IP40
Udarna čvrstoća	≥ IK03
Način montaže	Stropna ugradna opcija Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA klase E 8101	AA4
Proizvođač	Schrack


Dimensions NLILD... (mm)

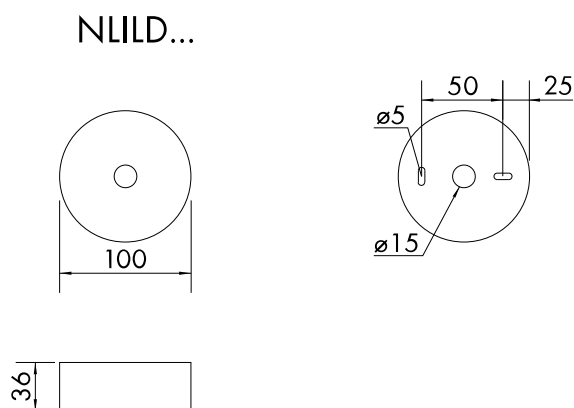


Dimensions accessoires NLILIP65 (mm)

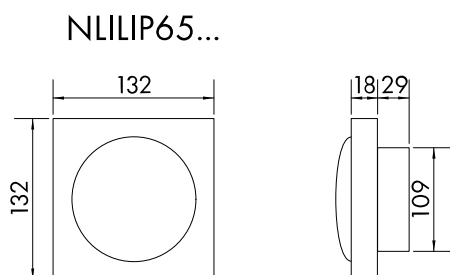

Dimensions accessoires Zinc die-cast housing NLEA.. (mm)

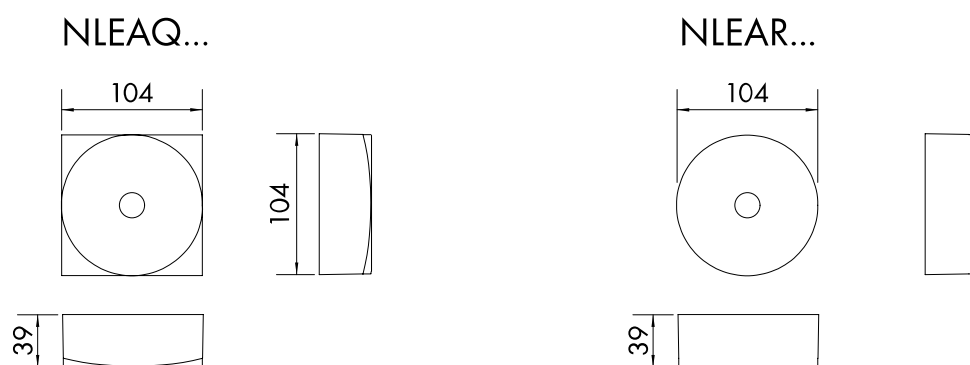

Wall illumination 5 lux for safety devices with optional beam lens (NLLSYSB4)
- Maintenance factor 0.8 - 1h/3h

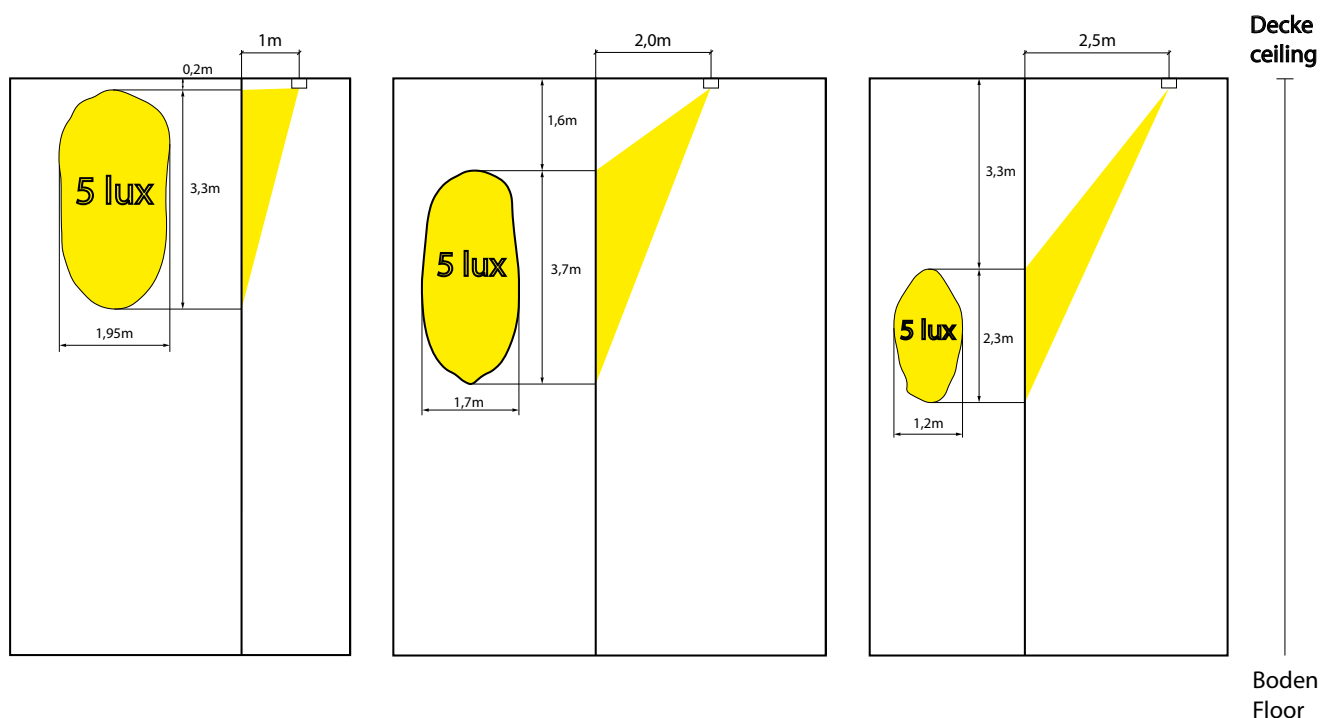

Spacing table with corridor lens (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	2,45	6,67	10,92	15,17	6,67
2,50	2,50	6,89	12,22	17,50	7,71
3,00	2,45	7,10	13,48	19,76	8,56
3,50	2,35	7,18	14,50	21,83	9,28
4,00	2,40	7,15	15,32	23,59	9,89
5,00	2,06	7,10	12,19	22,97	2,87

Spacing table with round lens (included in scope of delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,96	8,47	8,47	8,47	3,96
2,50	4,74	10,16	10,16	10,16	4,74
3,00	5,34	11,81	11,81	11,81	5,34
3,50	5,60	13,34	13,34	13,34	5,60
4,00	1,88	12,07	12,07	12,07	1,88

Spacing table with spot lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,15	4,86	4,86	4,86	2,15
3,00	2,42	5,55	5,55	5,55	2,42
3,50	2,71	6,13	6,13	6,13	2,71
4,00	2,95	6,63	6,63	6,63	2,95
5,00	3,36	7,78	7,78	7,78	3,36
6,00	3,73	8,70	8,70	8,70	3,73
7,00	3,99	9,52	9,52	9,52	3,99
8,00	4,13	10,29	10,29	10,29	4,13
9,00	4,17	10,91	10,91	10,91	4,17
10,00	4,12	11,38	11,38	11,38	4,12
12,00	3,71	11,83	11,83	11,83	3,71
14,00	2,80	11,73	11,73	11,73	2,80

Spacing table with high corridor lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	1,68	4,18	7,30	10,25	4,41
2,50	1,85	4,75	8,28	11,83	4,99
3,00	1,55	5,09	9,09	13,22	5,47
3,50	1,50	5,14	9,72	14,38	5,86
4,00	1,49	4,97	10,14	15,35	6,19
5,00	1,66	4,30	10,51	16,99	6,63
6,00	1,78	4,30	10,80	18,26	6,80
7,00	1,82	4,69	11,06	19,13	6,80
8,00	1,88	4,96	11,07	19,55	6,66
9,00	1,86	5,08	10,89	19,70	6,38
10,00	1,76	5,19	10,75	19,64	5,87
12,00	1,36	5,32	9,72	18,94	4,27

Tabela artikla

OPIS	KAT. BROJ
IL ERTLED 3h NŽ WL panika, bežično upravljanje, crna	
Black, White, surface ceiling mounting, LiFePO4 battery, emergency luminaire with exchangeable lenses, including lenses for illuminating escape routes or for illuminating round surfaces, central switching, 250lm	NLILDLS23W
Dodatni pribor	
Ugradni okvir za NLILD crni	NLILDES
Required ceiling cut out: diameter 114 mm	
Distancere za NLILD crni	NLILDAPA2S

Tabela artikla

OPIS	KAT. BROJ
Dodatni pribor	
Set sa 4 leće za NLILDK423S; za visoke prostore	NLLSYSS4
Pribor za univerzalna nužnu svjetiljku NLILDK423S	
Dodatno kvadratno kućište tip B1 za svjetiljku NLILD	NLILB1
Dodatno kvadratno kućište tip B2 za svjetiljku NLILD	NLILB2
Natično okruglo kućište bijelo za NLILD, cink metalno	NLEAR
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Natično okruglo kućište antracit za NLILD, cink metalno	NLEARAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Natično kvadratno kućište B1 bijelo za NLILD, cink metalno	NLEAQ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Natično kvadratno kućište B1 antracit za NLILD, cink metalno	NLEAQAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
I x h x d: 200 x 200 x 90mm	
Nadgradno kućište IP65 bijele boje za seriju NLILD	NLILIP65K
Polikarbonat, sa bočnim uvodom kablova	
Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW	
Za serije KM, KSC, KMB, ASM, ZAW, NLIL L23., LiFePO4 - Litij-željezna fosfatna baterija, UN3480 - UN 3480 : Litij-ionske baterije, kompatibilne s akumulatorom 3,2V 3,3Ah	NLAKKU3230
IP65 kućište za Desing IL stropna montaža, boja antracit	
Kućište za stropnu montažu sigurnosnih svjetiljki NLILD..., uključena prilagodna, anti vandal zaštita u skladu sa test otpornošću za K10, otpornost na udarac lopte u skladu sa DIN 18032, IP65, boja antracit	NLILIK10A