

Tehnički list za artikl: NLILE5028W

Design IL ERT-LED 1x3W 230VAC

8h , bežična, SPOT, ugradna

White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 6,9m at mounting height 8m, central switching



Tehnički podaci

Neto visina (mm)	95,00
Neto promjer (mm)	122,00
Neto masa (kg)	0,30
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Plastične svjetiljke
Dizajn	IL
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Vrijeme autonomije (h)	8
Rasvjetno tijelo	ERT-LED (3W)
Lumen	110
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	4,8/2,0 NiMH
IP stupanj zaštite	IP20
Način montaže	Stropna ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	30
AA klase E 8101	AA4

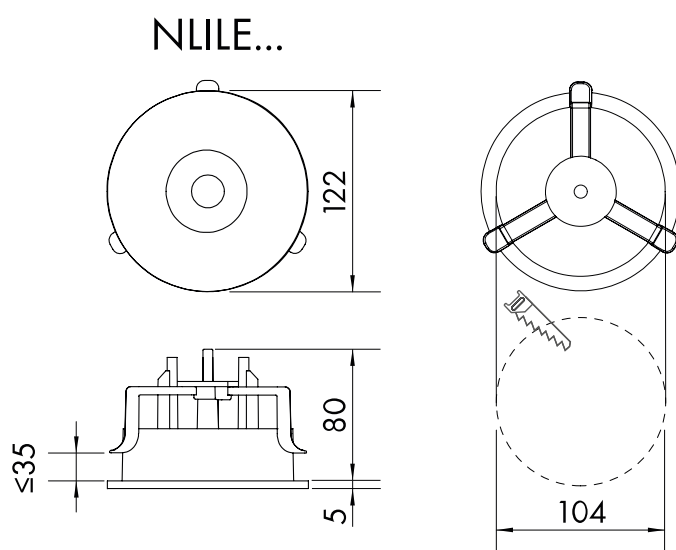
Dimensions NLILE... (mm)

Tabela artikla

OPIS	KAT. BROJ
Design IL ERT-LED 1x3W 230VAC 8h ,bežična, SPOT, ugradna White, recessed ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 6,9m at mounting height 8m, central switching	NLILES028W
Dodatni pribor	
Alat za jednostavno otvaranje panik svj. Design IL, uzidna	NLILTOOL
HSS Bi-metal cilindar pila (kruna), 105/36mm, bez adaptera	GI63290105
Zaštita od lopte od pleksija Dim 190x190x62mm, Desing IL/EA Debljina 5mm, preporuka za NLIL..nadzidnu montažu	NLBALLPLX4
Zaštitna mreža za Design IL, KI, VI, RI, KT, DAQ, DAR l x h x d: 200 x 200 x 90mm	NLBALL3
Baterija 4,8V 2,0Ah za svjet. sa vl. nap. LED sa LPU modulom LPU ili LEM modul	NLAKKU4820