

Tehnički list za artikl: NLKBUC03SC

Panik svjet.KB, autotest LED, 1h/3h/8h, 230VAC, univ.ugradnja

IP65, temp. range -30° up to 40°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 160lm




Tehnički podaci

Neto duljina (mm)	326,00
Neto širina (mm)	50,00
Neto visina (mm)	50,00
Neto masa (kg)	1,01
Vrsta svjetiljke	Modularna sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke
Dizajn	KB
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (3W)
Lumen	1h:300 3h:300 8h:160
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	4,50



Tehnički podaci - nastavak

Power non-maintained mode (W)	0,35
Power max. (W)	6,10
Baterija (V/Ah)	9,6/2,0 NiMh
IP stupanj zaštite	IP65
Udarna čvrstoća	IK05
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-30
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

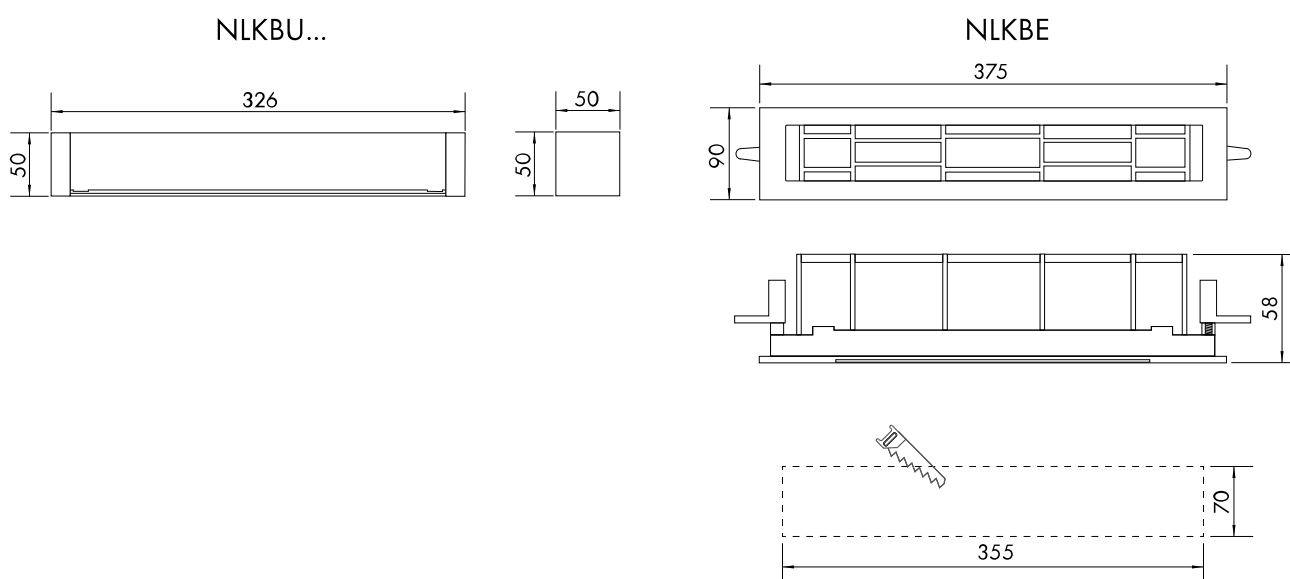


Drilling distances (mm)

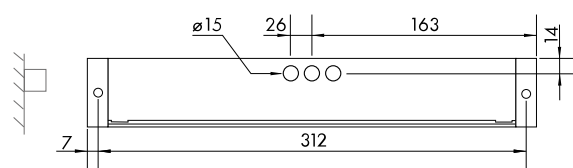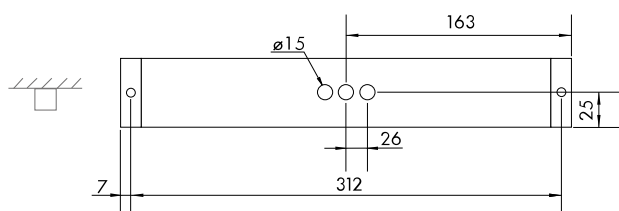


Dimensions (mm) optional pictogram edges


NLKBG

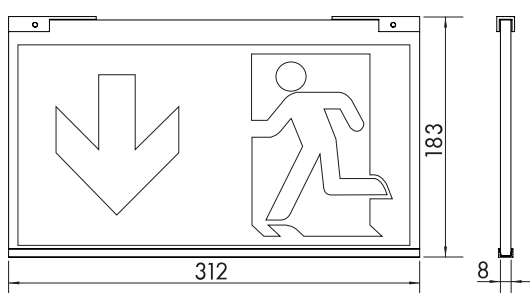


NLKBM

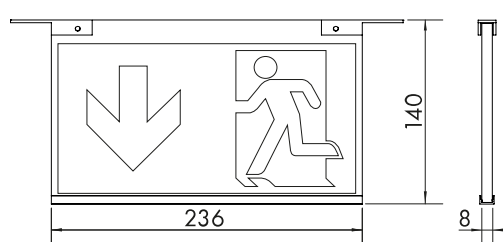

NLKBK

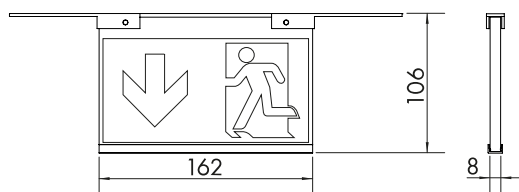

Dimensions (mm)

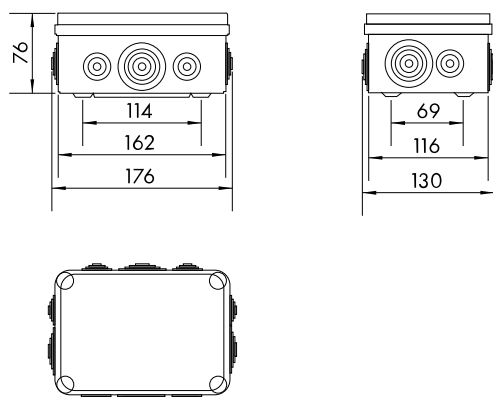

Podatkovna tablica: Panik svjet.KB, autotest LED, 1h/3h/8h, 230VAC, univ.ugradnja

					
2,00	3,36	8,33	8,22	8,13	3,35
2,50	3,64	9,15	9,09	9,04	3,66
3,00	3,86	9,78	9,78	9,78	3,86
3,50	4,01	10,32	10,35	10,37	3,97
4,00	4,08	10,77	10,79	10,81	4,02
5,00	4,07	11,41	11,36	11,30	3,92
6,00	3,82	11,65	11,54	11,42	3,53
7,00	3,18	11,60	11,38	11,14	2,87
8,00	1,92	11,25	10,85	10,48	1,79

Podatkovna tablica: Panik svjet.KB, autotest LED, 1h/3h/8h, 230VAC, univ.ugradnja

					
2,00	2,72	6,87	6,85	6,84	2,73
2,50	2,89	7,45	7,47	7,48	2,87
3,00	2,97	7,90	7,91	7,92	2,92
3,50	2,96	8,23	8,21	8,18	2,87
4,00	2,89	8,42	8,36	8,30	2,74
5,00	2,38	8,45	8,32	8,16	2,16
6,00	0,96	8,06	7,78	7,50	0,93

Tabela artikla

OPIS	KAT. BROJ
Panik svjet.KB, autotest LED, 1h/3h/8h, 230VAC,univ.ugradnja IP65, temp. range -30° up to 40°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 160lm	NLKBUC03SC
Dodatni pribor	
Piktogramska plexi ploča za lampu KB, komplet. 4 pictograma	NLKBM
Piktogramska plexi ploča za lampu KB, komplet. 4 pictograma	NLKBG
Piktogramska plexi ploča za lampu KB, komplet. 4 pictograma	NLKBK
Zaštita od kiše za svjetiljku Design KB od plexiglasa	NLKBRD
Okvir za ugradnju u strop za svjetiljku tip KB Required ceiling cut out: 355 x 70 mm	NLKBE
Kućište za ugradnju u beton za lampu tip KB	NLKBBE
Paralelni stropni nosač za panik lampu KB	NLAWW008
Baterija 9,6V 2,0Ah za paniku sa ERT-LED autonomije 1h,3h,8h Za LPU modul	NLAKKU9620
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2DS
Par cijevnih nosača bijeli, montaža strop	NL2DW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm , komplet 1 par	NLCORD4