

Tehnički list za artikl: NLKEU033SC

Panik svjetiljka KE 4X1W ERT-LED 1h, 3h, 8h 230VAC, univ.mont.

Universal mounting, 1h/3h/8h adjustable, 1h: 520lm; 3h: 520lm; 8h: 200lm



Tehnički podaci

Neto duljina (mm)	332,00
Neto širina (mm)	48,00
Neto visina (mm)	72,00
Neto masa (kg)	0,80
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KE
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Vrijeme autonomije (h)	3
Rasvjetno tijelo	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMh
IP stupanj zaštite	IP40
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
AA klase E 8101	AA4


Tehnički podaci - nastavak

Proizvođač


Schrack

Dimensions (mm)




NLKE...








NLKE... + NLKEE



NLKEE

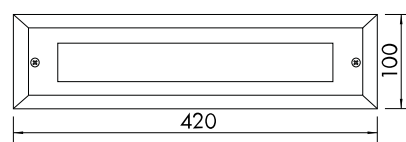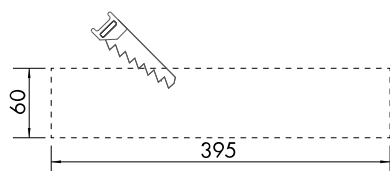

Drilling distances (mm)

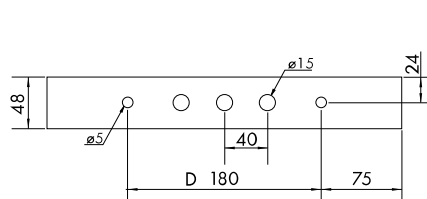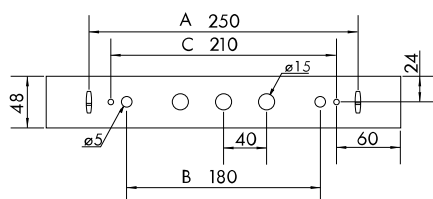

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	8,02	20,31	17,19	7,16	2,86
2,50	9,33	22,81	19,1	7,86	3,09
3,00	9,81	24,91	20,52	8,38	3,22
3,50	10,16	26,78	21,59	8,79	3,26
4,00	10,42	28,26	22,14	9,09	3,36
5,00	10,26	30,36	21,54	9,46	3,24
6,00	8,26	30,94	19,08	9,50	2,92
7,00	4,72	29,70	13,58	9,26	2,42
8,00	4,62	24,42	11,84	8,76	1,56

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 8h autonomy time

Montagehöhe [m]					
2,00	6,16	15,98	13,07	5,32	2,00
2,50	6,51	17,57	13,75	5,65	2,02
3,00	6,43	18,71	13,51	5,84	2,02
3,50	5,60	19,23	12,50	5,90	1,86
4,00	3,01	19,00	10,98	5,85	1,70

Tabela artikla

OPIS	KAT. BROJ
Panik svjetiljka KE 4X1W ERT-LED 1h,3h,8h 230VAC,univ.mont. Universal mounting, 1h/3h/8h adjustable, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKEU033SC
Dodatni pribor	
Baterija 9,6V 2,0Ah za paniku sa ERT-LED autonomije 1h,3h,8h Suitable for LPU module	NLAKKU9620
Okvir za ugradnju KX/KE panik lampe u strop veliki otvor	NLKEE-EB
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4