

Tehnički list za artikl: NLKMB403SC

Emergency luminaire KMB Autotest LED 3h 230V AC, white

Universal mounting, with 4x0,5W High Power LED, with LiFePO₄ battery, emergency luminaire for illuminating escape routes, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm



Tehnički podaci



Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	50,00
Neto masa (kg)	0,29
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KMB
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Vrijeme autonomije (h)	3

Tehnički podaci - nastavak


Rasvjetno tijelo	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	≥ IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKMB...

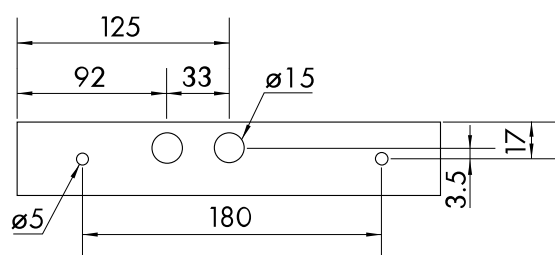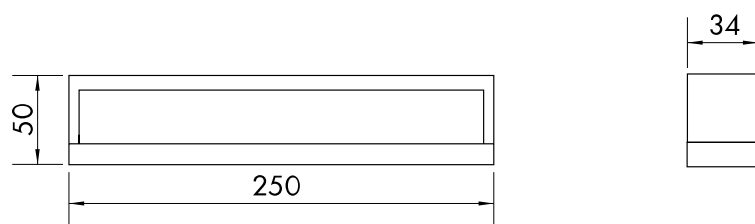

NLKME

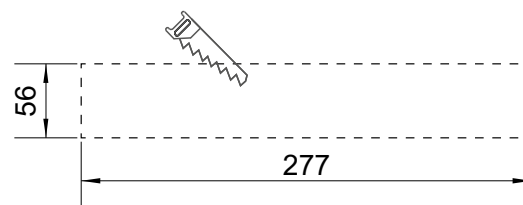

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KMB Autotest LED 3h 230V AC, white Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, emergency luminaire for illuminating escape routes, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm	NLKMB403SC
Dodatni pribor	
Ugradb.okvir za centr.bat.svjetiljku Design KM Required ceiling cut out: 277 x 56 mm	NLKME
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Cijevni nosač par dužine 500mm bijeli , ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4