

Tehnički list za artikl: NLKMBT03SC

KMB sigurnosna svj. LED 230V, 3h, SC, univerzalna mont.

White, universal mounting, with 4x0,5W HP-LED, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm, LiFePO₄ battery suitable for low temperatures -25° to 40°C



Tehnički podaci



Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	50,00
Neto masa (kg)	0,29
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	KMB
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Rasvjetno tijelo	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85

Tehnički podaci - nastavak




Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterija (V/Ah)	3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP54
Udarna čvrstoća	≥ IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4
Proizvođač	Schrack

Dimensions (mm)

NLKMB...

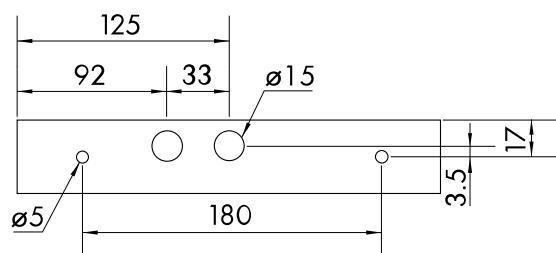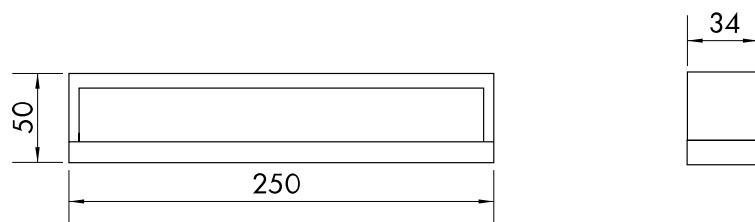

NLKME

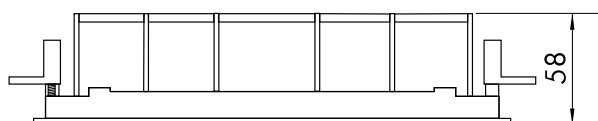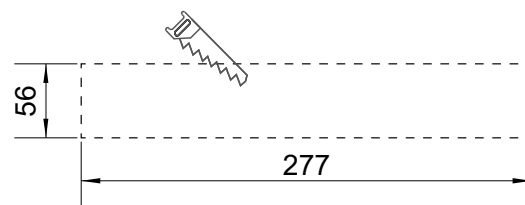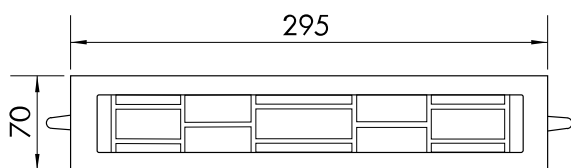

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - Autonomy time 8h**

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Tabela artikla

OPIS	KAT. BROJ
KMB sigurnosna svj. LED 230V, 3h, SC, univerzalna mont. White, universal mounting, with 4x0,5W HP-LED, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm, LiFePO4 battery suitable NLKMBT03SC for low temperatures -25° to 40°C	
Dodatni pribor	
Ugradb.okvir za centr.bat.svjetiljku Design KM Required ceiling cut out: 277 x 56 mm	NLKME
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
Cijevni nosač par dužine 500mm bijeli , ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKS
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sjajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sjajla dužine 4000mm , komplet 1 par	NLCORD4