

Tehnički list za artikl: NLKMU403SC

# Emergency luminaire KM Autotest LED 3h 230V AC, white

Universal mounting, with 4x0,5W High Power LED, with LiFePO<sub>4</sub> battery, 1h/3h/8h adjustable, exit sign luminaire, viewing distance: 24m, 1h: 170lm; 3h: 170lm; 8h: 76lm



## Tehnički podaci


|                   |                                                                                                                                 |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto duljina (mm) | 250,00                                                                                                                          |
| Neto širina (mm)  | 34,00                                                                                                                           |
| Neto visina (mm)  | 174,00                                                                                                                          |
| Neto masa (kg)    | 0,60                                                                                                                            |
| Vrsta svjetiljke  | Panik svjetiljka                                                                                                                |
| VB-CPS            | Sa vlastitom baterijom                                                                                                          |
| Funkcija          | Samokontrola                                                                                                                    |
| Izvedba/tip       | Plastične svjetiljke                                                                                                            |
| Dizajn            | KM                                                                                                                              |
| Bezhalogena       | Plastično kućište, bez halogena                                                                                                 |
| Boja              | RAL 9003 (bijela)                                                                                                               |
| Piktogram         | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |

## Tehnički podaci - nastavak


|                                |                                                                               |
|--------------------------------|-------------------------------------------------------------------------------|
| Područje detekcije (m)         | 24                                                                            |
| Vrijeme autonomije (h)         | 3                                                                             |
| Rasvjetno tijelo               | LED (2W)                                                                      |
| Područje napona (V)            | 230V AC 50Hz ±20%                                                             |
| Power maintained mode (W)      | 3,30                                                                          |
| Power non-maintained mode (W)  | 1                                                                             |
| Power max. (W)                 | 4,60                                                                          |
| Baterija (V/Ah)                | 3,2/3,0 LiFePO4                                                               |
| IP stupanj zaštite             | IP54                                                                          |
| Udarna čvrstoća                | IK03                                                                          |
| Način montaže                  | Stropna ugradna opcija<br>Zidna nadgradna<br>Stropna nadgradna<br>Univerzalno |
| Min. temperatura okoline (°C)  | -5                                                                            |
| Maks. temperatura okoline (°C) | 40                                                                            |
| AA klase E 8101                | AA4                                                                           |
| Proizvođač                     | Schrack                                                                       |

## Abmessungen (mm)


NLKM...

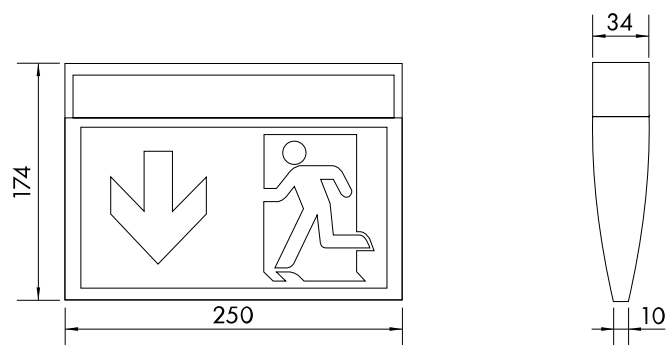

NLKME

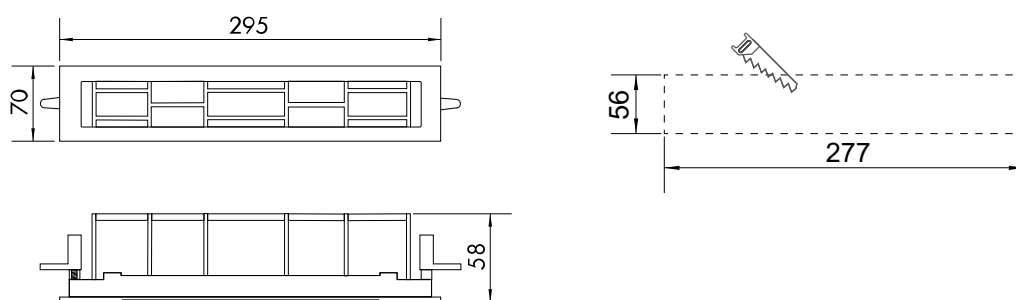

## Bohrabstände (mm)

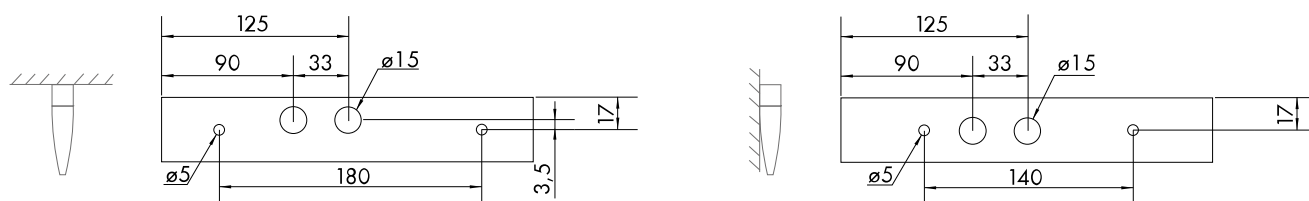

## Tabela artikla

| OPIS                                                                                                                                                                  | KAT. BROJ  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire KM Autotest LED 3h 230V AC, white                                                                                                                 |            |
| Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, exit sign luminaire, viewing distance: 24m, 1h: 170lm; 3h: 170lm; 8h: 76lm | NLKMU403SC |
| <b>Dodatni pribor</b>                                                                                                                                                 |            |
| Cijevni nosač kromirani, montaža strop                                                                                                                                | NLDSA000   |
| Ovjesna sajla dužine 2000mm , komplet 1 par                                                                                                                           | NLCORD2    |
| Ovjesna sajla dužine 4000mm , komplet 1 par                                                                                                                           | NLCORD4    |
| Zaštitna mrežica za panike KD,KS,LI,M                                                                                                                                 |            |
| I x h x d: 320 x 220 x 120mm                                                                                                                                          | NLBALL1    |
| Cijevni nosač par dužine 500mm bijeli , ožičeni                                                                                                                       | NL2DWKMKS  |
| Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery                                                                                        |            |
| Accu LiFePO4 3,2V 3,3Ah for LED luminaire                                                                                                                             |            |
| For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah     | NLAKKU3233 |
| Zidni nosač za panik svjetiljke Design KM/KS                                                                                                                          | NLAWKSU    |