

Tehnički list za artikl: NLKMU403WL

Emergency luminaire KM WirelessControl LED 3h 230V AC, white

Universal mounting, with 4x0,5W High Power LED, with LiFePO₄ battery, exit sign luminaire, viewing distance: 24m



Tehnički podaci


Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Plastične svjetiljke
Dizajn	KM
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak


Područje detekcije (m)	24
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

NLKM...

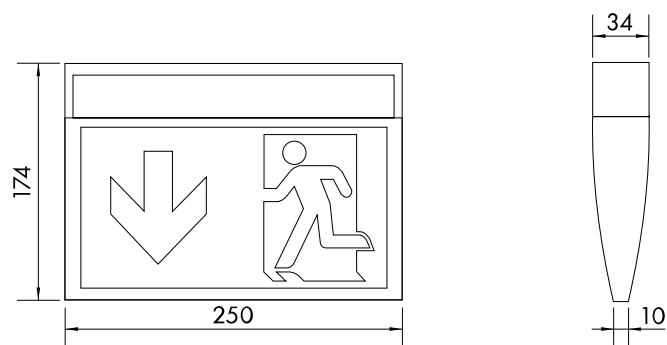

NLKME

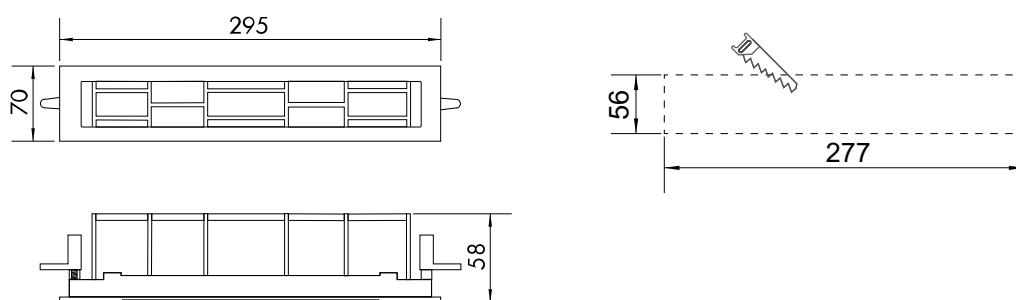

Bohrabstände (mm)

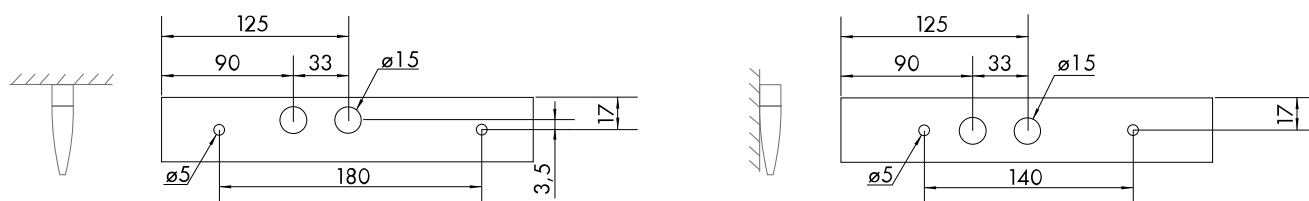


Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KM WirelessControl LED 3h 230V AC, white	NLKMU403WL
Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, exit sign luminaire, viewing distance: 24m	
Dodatni pribor	
Ugradb.okvir za centr.bat.svjetiljku Design KM	NLKME
Required ceiling cut out: 277 x 56 mm	
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Cijevni nosač par dužine 500mm bijeli , ožičeni	NL2DWKMKS
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
I x h x d: 320 x 220 x 120mm	
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm , komplet 1 par	NLCORD4