

Tehnički list za artikl: NLKMU408WB

Emergency luminaire KM WirelessConnect LED 8h 230V AC, white

White, Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.



Tehnički podaci


Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessConnect
Izvedba/tip	Plastične svjetiljke
Dizajn	KM
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Tehnički podaci - nastavak


Područje detekcije (m)	24
Vrijeme autonomije (h)	8
Rasvjetno tijelo	LED (2W)
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	4,60
Baterija (V/Ah)	3,2/3,3 LiFePO4
IP stupanj zaštite	IP40
Udarna čvrstoća	IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Mjerne skice: Emergency luminaire KM WirelessConnect LED 8h 230V AC, white

NLKM...

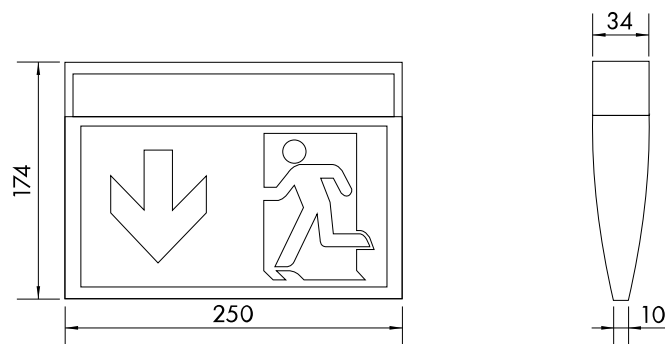

NLKME

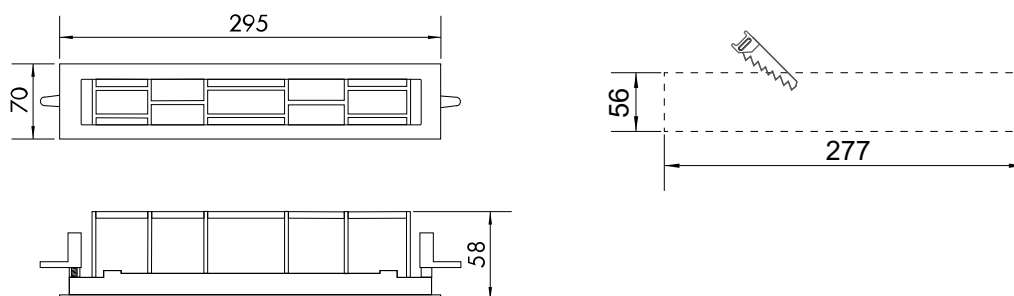

Mjerne skice: Emergency luminaire KM WirelessConnect LED 8h 230V AC, white

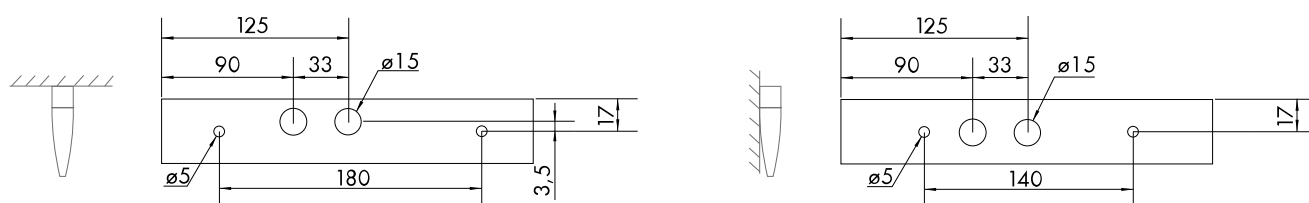


Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KM WirelessConnect LED 8h 230V AC, white White, Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.	NLKMU408WB
Dodatni pribor	
Ugradb.okvir za centr.bat.svjetiljku Design KM Required ceiling cut out: 277 x 56 mm	NLKME
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Cijevni nosač par dužine 500mm bijeli , ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKS
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm , komplet 1 par	NLCORD4