

Tehnički list za artikl: NLKMUS403B

# Emergency luminaire KM WirelessConnect LED 3h 230V AC, black

Universal mounting, with LiFePO<sub>4</sub> battery, exit sign luminaire, with Bluetooth communication.



## Tehnički podaci


|                        |                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto duljina (mm)      | 250,00                                                                                                                          |
| Neto širina (mm)       | 34,00                                                                                                                           |
| Neto visina (mm)       | 174,00                                                                                                                          |
| Neto masa (kg)         | 0,60                                                                                                                            |
| Vrsta svjetiljke       | Panik svjetiljka                                                                                                                |
| VB-CPS                 | Sa vlastitom baterijom                                                                                                          |
| Funkcija               | WirelessConnect                                                                                                                 |
| Izvedba/tip            | Plastične svjetiljke                                                                                                            |
| Dizajn                 | KM                                                                                                                              |
| Bezhalogena            | Plastično kućište, bez halogena                                                                                                 |
| Boja                   | RAL 9005 (crna)                                                                                                                 |
| Piktogram              | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Područje detekcije (m) | 24                                                                                                                              |

## Tehnički podaci - nastavak


|                                |                                                                               |
|--------------------------------|-------------------------------------------------------------------------------|
| Vrijeme autonomije (h)         | 3                                                                             |
| Rasvjetno tijelo               | LED (2W)                                                                      |
| Područje napona (V)            | 230V AC 50Hz ±20%                                                             |
| Power maintained mode (W)      | 3,90                                                                          |
| Power non-maintained mode (W)  | 1,50                                                                          |
| Power max. (W)                 | 5,30                                                                          |
| Baterija (V/Ah)                | 3,2/3,3 LiFePO4                                                               |
| IP stupanj zaštite             | IP54                                                                          |
| Udarna čvrstoća                | IK03                                                                          |
| Način montaže                  | Stropna ugradna opcija<br>Zidna nadgradna<br>Stropna nadgradna<br>Univerzalno |
| Min. temperatura okoline (°C)  | -5                                                                            |
| Maks. temperatura okoline (°C) | 40                                                                            |
| AA klase E 8101                | AA4                                                                           |
| Proizvođač                     | Schrack                                                                       |

**Mjerne skice: Emergency luminaire KM WirelessConnect LED 3h 230V AC, black**


NLKM...

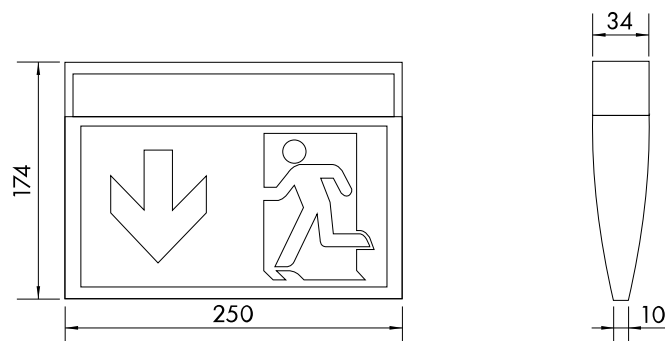

NLKME

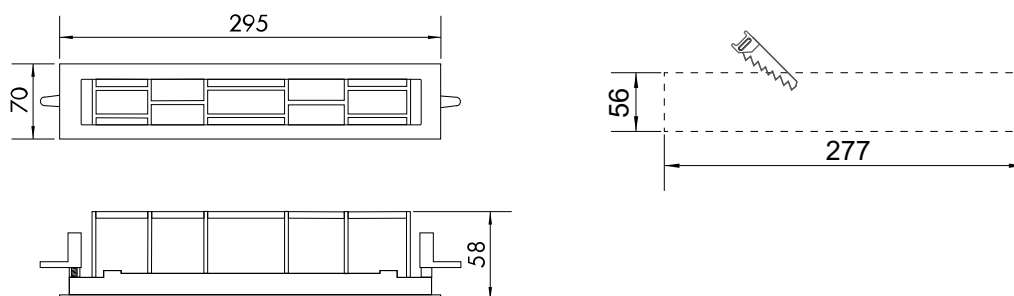

**Mjerne skice: Emergency luminaire KM WirelessConnect LED 3h 230V AC, black**

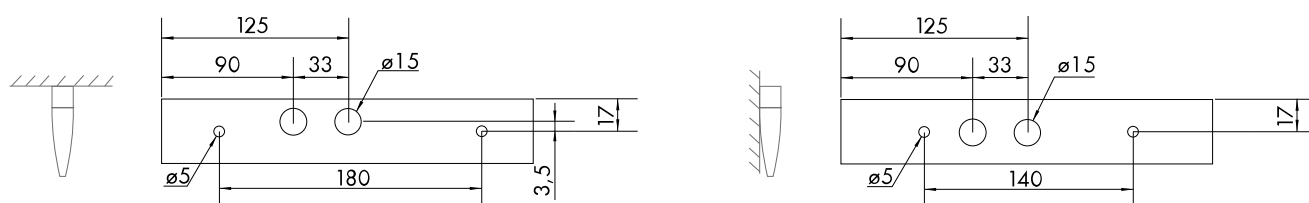

## Tabela artikla

| OPIS                                                                                                                                                                                                              | KAT. BROJ  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire KM WirelessConnect LED 3h 230V AC, black<br>Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.                                                      | NLKMUS403B |
| <b>Dodatni pribor</b>                                                                                                                                                                                             |            |
| Ugradni okvir za KM i KS, crni, samo za svjetiljke bez bat.<br>Required ceiling cut out: 277 x 56 mm                                                                                                              | NLKMES     |
| Accu LiFePO4 3,2V 3,3Ah for LED luminaire<br>For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion<br>batteries, compatible to accu 3,2V 3,3Ah | NLAKKU3233 |
| Cijevni nosač kromirani, montaža strop                                                                                                                                                                            | NLDSA000   |
| Ovjesna sjajla dužine 2000mm , komplet 1 par                                                                                                                                                                      | NLCORD2    |
| Ovjesna sjajla dužine 4000mm , komplet 1 par                                                                                                                                                                      | NLCORD4    |