

Sigurnosna svjetiljka KS, 3h/230V AC, bežična

Univerzalna montaža, 4x0,5W HP LED, LiFePO4 baterija, s prozirnim pokrovom za dodatno osvjetljenje evakuacijskog puta



Tehnički podaci



Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke
Dizajn	KS
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	190

Tehnički podaci - nastavak




Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	≥ IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)



NLKS...

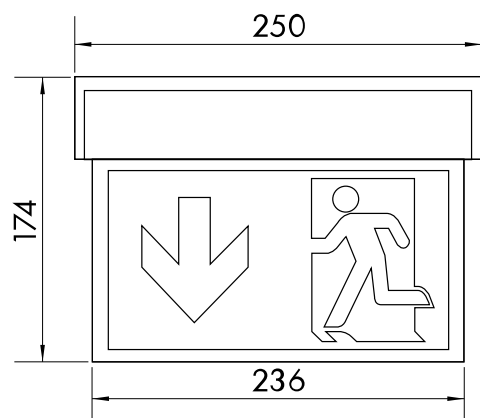

NLKME

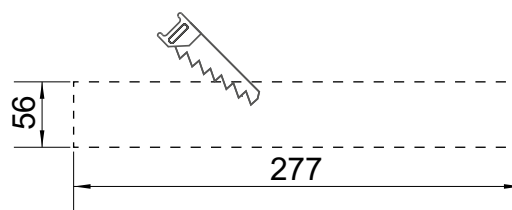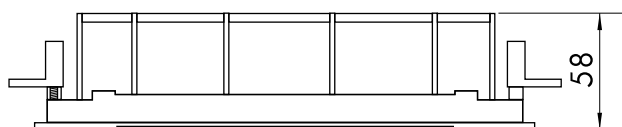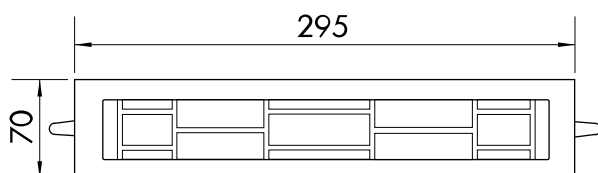

Drilling distances (mm)

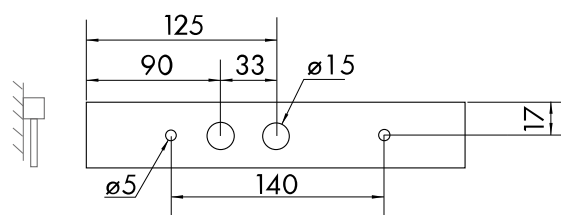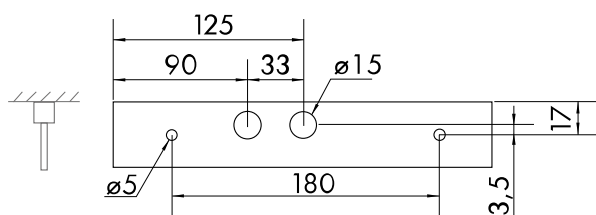

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Tabela artikla

OPIS	KAT. BROJ
Sigurnosna svjetiljka KS, 3h/230V AC, bežična	NLKSC003WL
Univerzalna montaža, 4x0,5W HP LED, LiFePO4 baterija, s prozirnim pokrovom za dodatno osvjetljenje evakuacijskog puta	
Dodatni pribor	
Baterija 3,2V 3,0Ah LiFePO4 za LED EB-svj. KSC, KMB, ZAW	
Za serije KM, KSC, KMB, ASM, ZAW, NLIL. L.23., LiFePO4 - Litij-željezna fosfatna baterija, UN3480 - UN 3480 : Litij-ionske baterije, kompatibilne s akumulatorom 3,2V 3,3Ah	NLAKKU3230
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Cijevni nosač par dužine 500mm bijeli, ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M l x h x d: 320 x 220 x 120mm	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm, komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm, komplet 1 par	NLCORD4