

Tehnički list za artikl: NLKSC408WB

Emergency luminaire KS WirelessConnect LED

8h 230V AC, white

Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 85lm



Tehnički podaci


Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessConnect
Izvedba/tip	Plastične svjetiljke
Dizajn	KS

Tehnički podaci - nastavak



Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	8
Rasvjetno tijelo	LED (2W)
Lumen	85
Područje napona (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	$\geq IK03$
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Mjerne skice: Emergency luminaire KS WirelessConnect LED 8h 230V AC, white



NLKS...

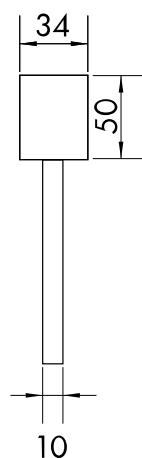

NLKME

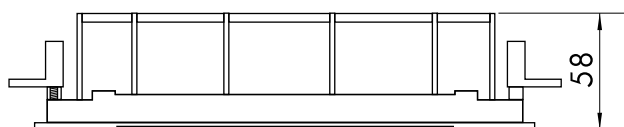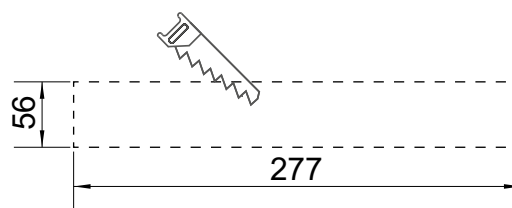

Mjerne skice: Emergency luminaire KS WirelessConnect LED 8h 230V AC, white

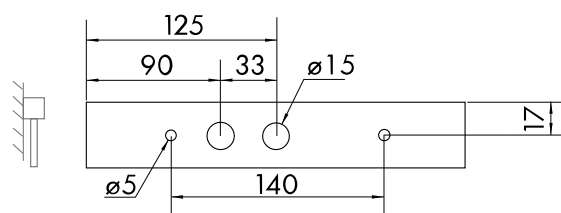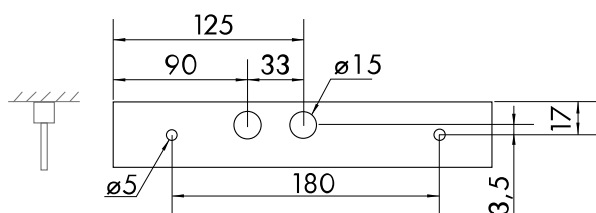

Podatkovna tablica: Emergency luminaire KS WirelessConnect LED 8h 230V AC, white

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KS WirelessConnect LED 8h 230V AC, white	
Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, with Bluetooth communication, 85lm	NLKSC408WB
Dodatni pribor	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Cijevni nosač par dužine 500mm bijeli, ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm, komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm, komplet 1 par	NLCORD4