

Tehnički list za artikl: NLKSCS009E

KSC LED univerzalna EL Panik svjetiljka,

transparentni pokrov, crna



Tehnički podaci



Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,62
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke
Dizajn	KS
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)

Tehnički podaci - nastavak




Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Rasvjetno tijelo	LED (2W)
Lumen	220
Područje napona (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,20
Power non-maintained mode (W)	1
Power max. (W)	3,20
IP stupanj zaštite	IP54
Udarna čvrstoća	$\geq$ IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)



NLKS...

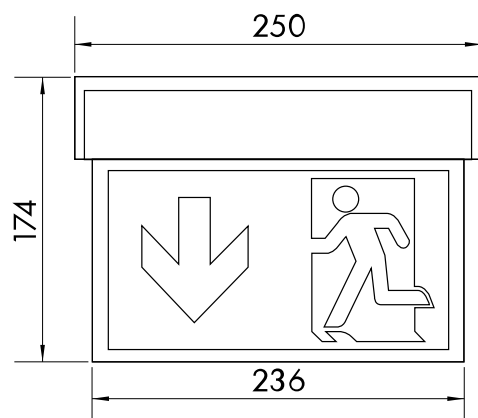

NLKME

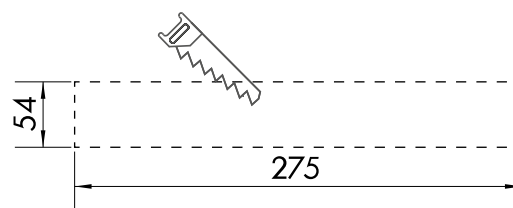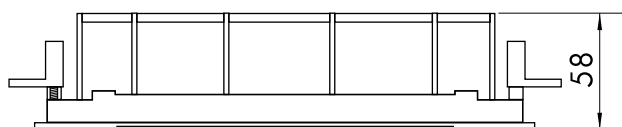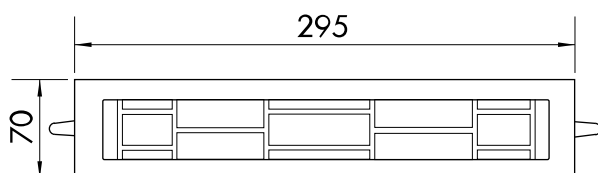

Drilling distances (mm)

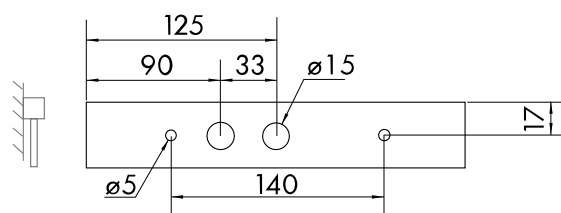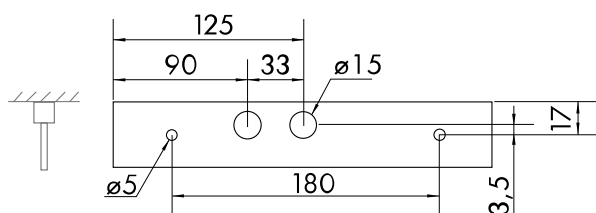

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	3,07	7,54	7,42	6,91	2,76
2,50	2,95	8,36	8,09	7,52	3,13
3,00	1,28	7,33	7,06	8,16	3,24
3,50	1,24	6,66	6,47	8,85	3
4,00	1,27	3,67	6,42	9,15	2,91
5,00	1,15	3,52	5,79	8,41	2,15

Tabela artikla

OPIS	KAT. BROJ
KSC LED univerzalna EL Panik svjetiljka, transparentni pokrov, crna	NLKSCS009E
Dodatni pribor	
Ugradni okvir za KM i KS, crni, samo za svjetiljke bez bat. Required ceiling cut out: 275 x 54 mm	NLKMES
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Cijevni nosač par dužine 500mm bijeli, ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm, komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm, komplet 1 par	NLCORD4