

Tehnički list za artikel: NLKSCS403W

Emergency luminaire KS WirelessControl LED 3h 230V AC, black

Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm



Tehnički podaci

Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Wireless control
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke
Dizajn	KS

Tehnički podaci - nastavak


Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9005 (crna)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	190
Područje napona (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	$\geq IK03$
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)


NLKS...



NLKME

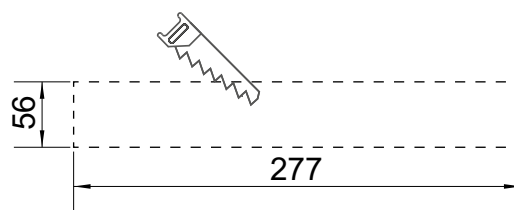

Bohrabstände (mm)

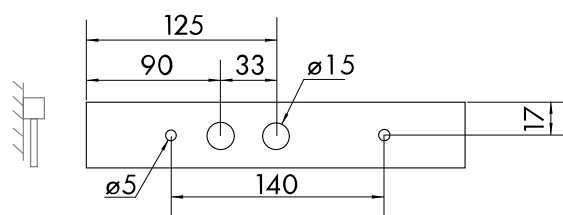

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KS WirelessControl LED 3h 230V AC, black Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm	NLKSCS403W
Dodatni pribor	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Cijevni nosač par dužine 500mm bijeli, ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M l x h x d: 320 x 220 x 120mm	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm, komplet 1 par	NLCORD2

Tabela artikla

OPIS	KAT. BROJ
Dodatni pribor	
Ovjesna sajla dužine 4000mm , komplet 1 par	NLCORD4