

Tehnički list za artikl: NLKSCT03WL

KSC sigurnosna svj. LED 230V, 3h, SC, za WirelessControl, TT

White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, radio switchable, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C



Tehnički podaci

Neto duljina (mm)	250,00
Neto širina (mm)	34,00
Neto visina (mm)	174,00
Neto masa (kg)	0,60
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Plastične svjetiljke Plosnate svjetiljke

Tehnički podaci - nastavak



Dizajn	KS
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Područje detekcije (m)	22
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (2W)
Lumen	190
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterija (V/Ah)	3,2/3,0 LiFePO4
IP stupanj zaštite	IP54
Udarna čvrstoća	≥ IK03
Način montaže	Stropna ugradna opcija Zidna nadgradna Stropna nadgradna Univerzalno
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLKS...



NLKME

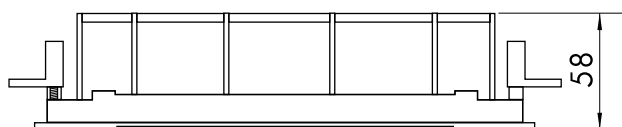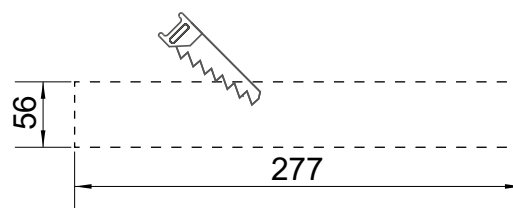

Drilling distances (mm)



Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Tabela artikla

OPIS	KAT. BROJ
KSC sigurnosna svj. LED 230V, 3h, SC, za WirelessControl, TT White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, radio switchable, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C	NLKST03WL
Dodatni pribor	
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
Ugradni-piktogram lijevo-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLO
Ugradni-piktogram lijevo-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTLU
Ugradni-piktogram desno-gore za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRO
Ugradni-piktogram desno-dolje za desing AM, KMB, KS, VM viewing distance: 22m	NLAMPIKTRU
Set piktograma "POŽAR" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set piktograma "PRVA POMOĆ" 2x4kom 22m sukladno ISO7010 pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Zidni nosač za panik svjetiljke Design KM/KS	NLAWKSU
Cijevni nosač par dužine 500mm bijeli , ožičeni Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Zaštitna mrežica za panike KD,KS,LI,M l x h x d: 320 x 220 x 120mm	NLBALL1
Cijevni nosač kromirani, montaža strop	NLDSA000
Ovjesna sajla dužine 2000mm , komplet 1 par	NLCORD2
Ovjesna sajla dužine 4000mm , komplet 1 par	NLCORD4