


Tehnički list za artikl: NLKWD001SC

Emergency luminaire KW Autotest LED 3h 230V AC ceiling

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm

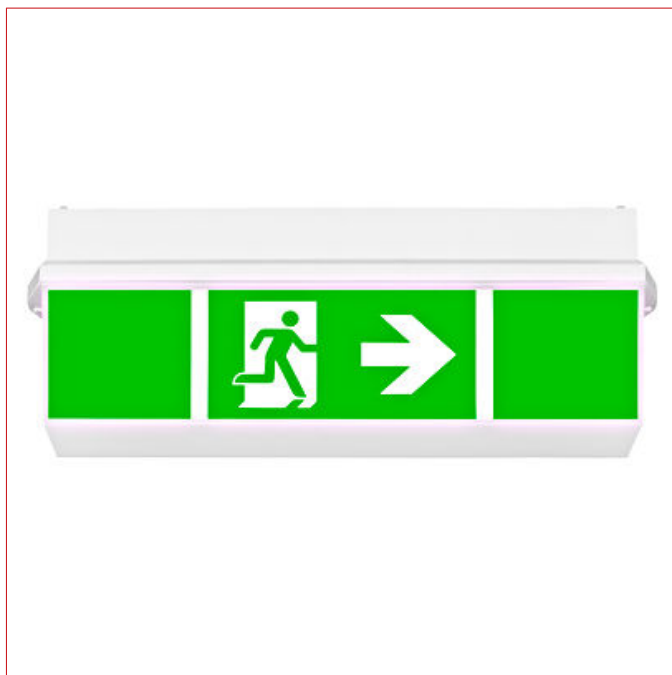


Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16

Tehnički podaci - nastavak

Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (3W)
Lumen	1h: 300;3h: 300
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP stupanj zaštite	IP54
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

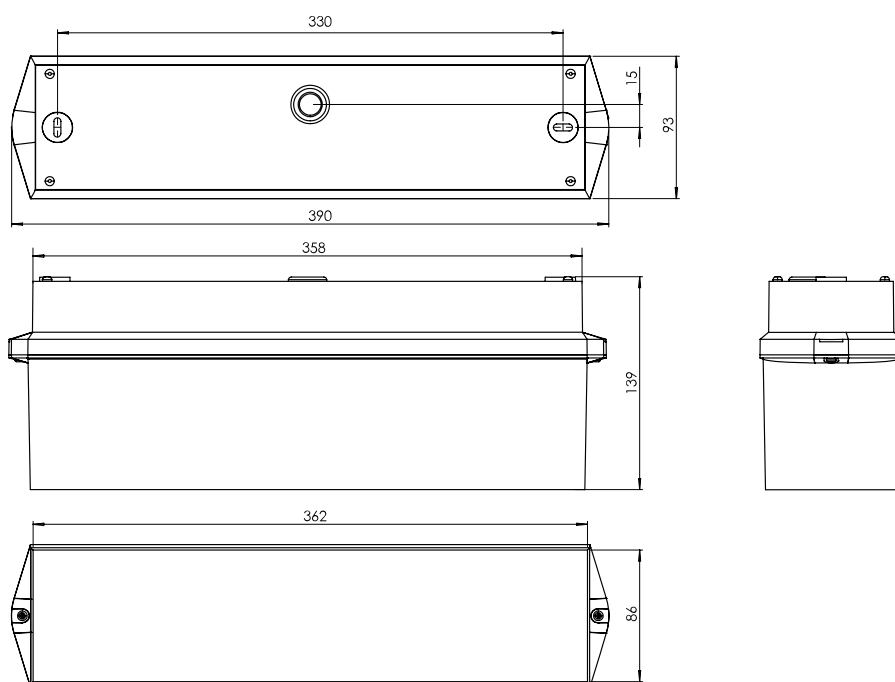

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,55	9,23	8,09	7,02	2,74
2,50	3,68	9,78	8,62	7,52	2,84
3,00	3,72	10,17	8,98	7,85	2,86
3,50	3,66	10,40	9,20	8,05	2,79
4,00	3,51	10,51	9,29	8,11	2,61
5,00	2,80	10,34	9,08	7,86	1,84

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	1,95	5,66	5,00	4,37	1,48
2,50	1,70	5,66	4,99	4,34	1,20
3,00	0,99	5,42	4,73	4,06	0,42

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KW Autotest LED 3h 230V AC ceiling 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD001SC side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm	
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001