

Tehnički list za artikl: NLKWD403SC

Emergency luminaire KW Autotest LED 3h

230VAC stropna

Univerzalna montaža, sa 4x0.5W High Power LED, sa LiFePO4 baterijom integriranom, odabir autonomije 1h/3h, raspoznatljivost 30m; 1h:340lm, 3h:170lm




Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto masa (kg)	0,80
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16
Vrijeme autonomije (h)	3

Tehnički podaci - nastavak

Rasvjetno tijelo	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	2x 3,2V/1,6Ah LiFePO4
IP stupanj zaštite	IP54
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Mjerne skice: Emergency luminaire KW Autotest LED 3h 230VAC stropna

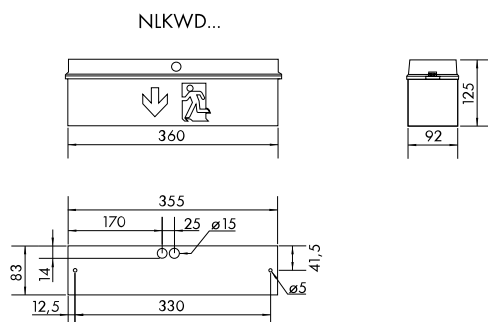

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,55	9,23	8,09	7,02	2,74
2,50	3,68	9,78	8,62	7,52	2,84
3,00	3,72	10,17	8,98	7,85	2,86
3,50	3,66	10,40	9,20	8,05	2,79
4,00	3,51	10,51	9,29	8,11	2,61
5,00	2,80	10,34	9,08	7,86	1,84

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KW Autotest LED 3h 230VAC stropna Univerzalna montaža, sa 4x0.5W High Power LED, sa LiFePO4 baterijom integriranom, odabir autonomije 1h/3h, raspoznatljivost NLKWD403SC 30m; 1h:340lm, 3h:170lm	
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Set 2x bat LiFePO4 3,2V 3,3Ah za WirelessControl svjetiljke LiFePO4 - Litij Željezo Fosfat baterija, norma UN3480	NLAKKU323L