

Tehnički list za artikl: NLKWICT33S

KWI sig. svj. 4x1W ERT-LED, 3h, SC, 230V, stropna mont. TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm




Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	99,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	KWI

Tehnički podaci - nastavak

Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Područje detekcije (m)	16
Rasvjetno tijelo	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 210
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,90
Power non-maintained mode (W)	2
Power max. (W)	7,30
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

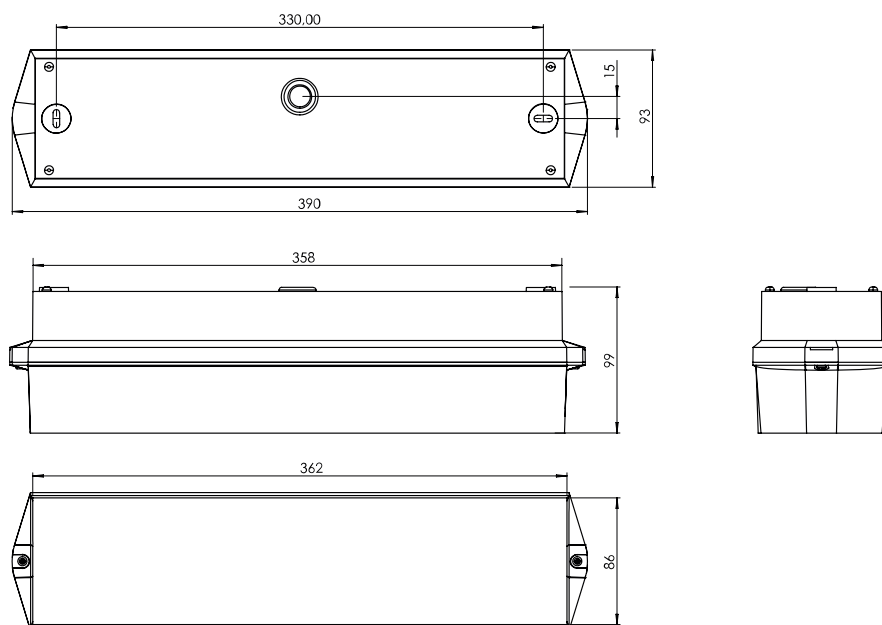

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	4,14	10,15	9,84	9,45	3,79
2,50	4,46	11,2	10,77	10,21	4,14
3,00	4,73	12,01	11,52	10,97	4,47
3,50	4,94	12,63	12,15	11,68	4,67
4,00	5,05	13,18	12,77	12,36	4,79
5,00	5,36	14,04	13,66	13,28	4,89
6,00	4,7	14,45	14,12	13,72	4,72
7,00	4,34	14,61	14,29	13,9	4,03
8,00	3,7	14,8	13,71	13,63	3,54
9,00	2,17	13,05	12,97	12,89	2,24

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	7,36	17,11	12,52	7,88	3,09
2,50	8,47	19,63	14,05	8,45	3,28
3,00	9,46	21,93	15,41	8,95	3,39
3,50	10,37	24,15	16,69	9,32	3,43
4,00	11,2	26,19	17,85	9,58	3,45
5,00	4,73	24,45	13,86	9,8	3,38
6,00	5,23	23,48	11,64	9,82	3,17
7,00	2,93	13,48	11,45	9,69	2,58

Spacing table with round lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,37	9,66	9,50 9,29 4,19	4,89	1,89
2,50	5,14	11,36	11,13 10,84 4,98	6,12	2,36
3,00	5,86	12,86	12,66 12,46 5,68	7,34	2,83
3,50	6,51	14,46	14,24 14,01 6,31	8,57	3,3
4,00	7,1	15,94	15,69 15,44 6,80	9,79	3,78
5,00	4,53	18,43	16,35 17,85 5,61	10,53	4,04
6,00	0,96	15,82	15,42 15,08 1,07	11,02	4,18

Spacing table with spot lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,3	5,58	5,58	5,58	2,3
3,00	2,77	6,7	6,7	6,7	2,77
3,50	3,08	7,33	7,33	7,33	3,08
4,00	3,3	7,75	7,75	7,75	3,3
5,00	3,84	8,81	8,81	8,81	3,84
6,00	4,26	9,8	9,8	9,8	4,26
7,00	4,65	10,85	10,85	10,85	4,65
8,00	4,97	11,74	11,74	11,74	4,97
9,00	5,21	12,49	12,49	12,49	5,21
10,00	5,35	13,27	13,27	13,27	5,35
12,00	5,4	14,46	14,46	14,46	5,4
14,00	5,18	15,16	15,16	15,16	5,18
16,00	4,69	15,36	15,36	15,36	4,69

Spacing table with high corridor lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,65	13,09	9,59	6,03	2,24
3,00	6,28	14,77	10,84	6,83	2,47
3,50	6,81	16,21	11,6	6,99	2,45
4,00	7,29	17,52	12,28	7,06	2,35
5,00	8,1	19,73	13,35	6,98	1,91
6,00	8,75	21,58	13,68	6,07	2
7,00	9,11	23,16	14,24	5,46	2,12
8,00	9,33	24,52	14,54	5,55	2,16
9,00	9,51	25,69	14,72	5,88	2,23
10,00	9,27	26,29	14,82	6,08	2,29
12,00	8,41	27,15	14,19	6,24	2,22
14,00	7,09	26,85	13,73	6,51	1,92
16,00	4,53	24,91	12,22	6,48	1,36

Spacing table (without lenses) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 8h

					
2,00	3,03	7,71	7,44	7,1	2,87
2,50	3,17	8,29	8,05	7,8	3,01
3,00	3,21	8,77	8,55	8,3	3,08
3,50	3,22	9,04	8,8	8,57	3,05
4,00	2,94	9,24	9,01	8,73	2,9
5,00	2,37	9,39	8,74	8,66	2,23
6,00	0,43	8,09	7,86	7,86	0,44

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	6,01	14,07	9,87	5,72	2,13
2,50	6,86	16,17	11,05	6,02	2,15
3,00	2,82	14,58	9,53	6,15	2,12
3,50	3,1	16,11	7,43	6,19	2,05
4,00	3,32	7,87	7,07	6,16	1,93

Spacing table with round lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,83	8,46	8,32	8,19	3,72
2,50	4,45	9,98	9,83	9,68	4,32
3,00	2,8	11,34	11,17	10,99	4,2
3,50	1,85	10,42	10,25	10,04	1,64

Spacing table with spot lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,8	4,46	4,46	4,46	1,8
2,50	2,03	4,81	4,81	4,81	2,03
3,00	2,32	5,38	5,38	5,38	2,32
3,50	2,56	5,82	5,82	5,82	2,56
4,00	2,75	6,39	6,39	6,39	2,75
5,00	3,11	7,35	7,35	7,35	3,11
6,00	3,33	8,13	8,13	8,13	3,33
7,00	3,42	8,82	8,82	8,82	3,42
8,00	3,39	9,32	9,32	9,32	3,39
9,00	3,25	9,62	9,62	9,62	3,25
10,00	3,01	9,73	9,73	9,73	3,01
7,00	3,42	8,82	8,82	8,82	3,42
9,00	3,25	9,62	9,62	9,62	3,25
11,00	2,61	9,69	9,69	9,69	2,61

Spacing table with high corridor lenses (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,91	9,4	6,88	4,32	1,51
2,50	4,41	10,74	7,57	4,42	1,42
3,00	4,83	11,86	8,11	4,42	1,22
3,50	5,18	12,84	8,51	4,13	1,23
4,00	5,43	13,7	8,63	3,49	1,29
5,00	5,69	15,15	8,97	3,44	1,38
6,00	5,71	16,1	9,15	3,75	1,42
7,00	5,29	16,58	9,09	3,88	1,44
8,00	4,83	16,94	8,79	3,98	1,36
9,00	4,03	16,43	8,31	4,1	1,19
10,00	2,72	15,47	7,54	4,08	0,9

Tabela artikla

OPIS	KAT. BROJ
KWI sig. svj. 4x1W ERT-LED, 3h, SC, 230V, stropna mont. TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm	NLKWICT33S
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. Lijevo, desno, gore i dolje	NLKWIPKTO
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
4 LED izmjenjive leće, radijalne, za evakuacijske puteve primjerene za korištenje sa svjetiljkama sa izmjenjivim lećama	NLLSYSF4
4 LED izmjenjive leće, okrugle, široko raspr. svjetlosti primjerene za korištenje sa svjetiljkama sa izmjenjivim lećama	NLLSYSR4
Set sa 4 leće za NLILDK423S; za visoke prostore Pribor za univerzalna nužnu svjetiljku NLILDK423S	NLLSYSS4
4 LED izmjenjive leće, asimetr., osvjetljavanje sig. opreme primjerene za korištenje sa svjetiljkama sa izmjenjivim lećama	NLLSYSB4
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV