

KWI sigurnosna svj. LED 230V, 3h, SC, univerzalna mont., TT

With 2x 3,2/3,3Ah LiFePO₄ batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, 1h: 300lm; 3h: 300lm; 8h: 120lm




Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	KWI
Bezhalogena	Plastično kućište, bez halogena

Tehnički podaci - nastavak

Boja	RAL 9003 (bijela)
Piktogram	Set samoljepljivih piktograma sadržan u isporuci (strelice: lijevo, desno, gore, dolje) prema ISO 7010
Područje detekcije (m)	16
Rasvjetno tijelo	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

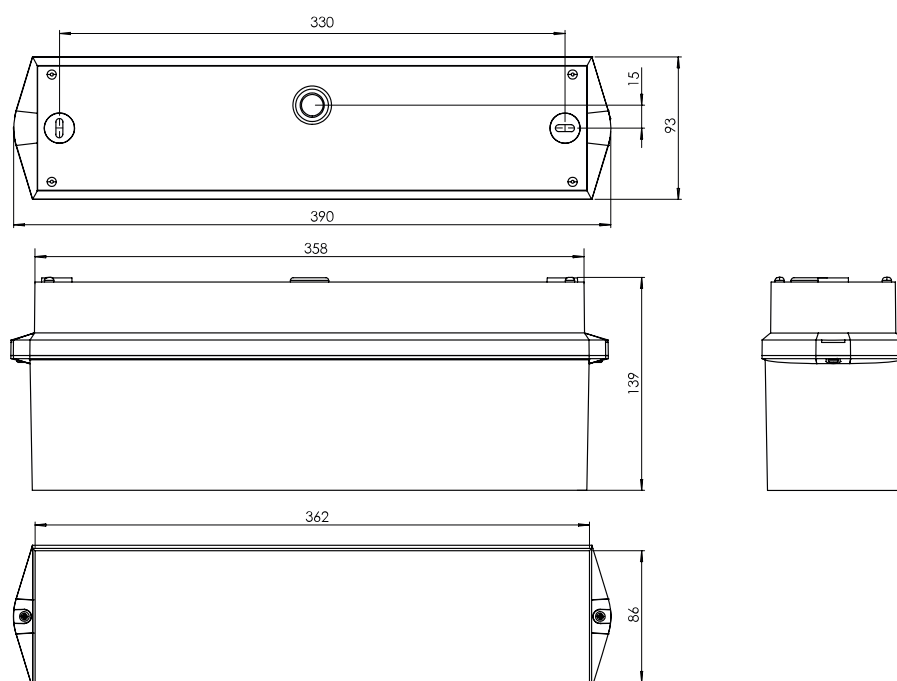

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	3,51	9,16	8,09	7,02	2,74
2,50	3,64	9,71	8,62	7,52	2,84
3,00	3,67	10,1	8,98	7,85	2,86
3,50	3,62	10,34	9,2	8,05	2,79
4,00	3,46	10,44	9,29	8,11	2,61
5,00	2,73	10,27	9,08	7,86	1,85

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 8h

					
2,00	1,88	5,55	5	4,37	1,48
2,50	1,6	5,55	4,99	4,34	1,2

Tabela artikla

OPIS	KAT. BROJ
KWI sigurnosna svj. LED 230V, 3h, SC, univerzalna mont., TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, 1h: 300lm; 3h: 300lm; 8h: 120lm	NLKWIDT03S
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. Lijevo, desno, gore i dolje	NLKWIPIKTO
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV