


Tehnički list za artikl: NLKWIDT33S

KWI sigurnosna svj. 4x1W ERT-LED, 3h, 230V, stropna mont. TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm




Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom

Tehnički podaci - nastavak

Funkcija	SelfControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	KWI
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Set samoljepljivih piktograma sadržan u isporuci (strelice: lijevo, desno, gore, dolje) prema ISO 7010
Područje detekcije (m)	16
Rasvjetno tijelo	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 210
Područje napona (V)	230V AC 50Hz $\pm$ 20%
Power maintained mode (W)	5,90
Power non-maintained mode (W)	2
Power max. (W)	7,30
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

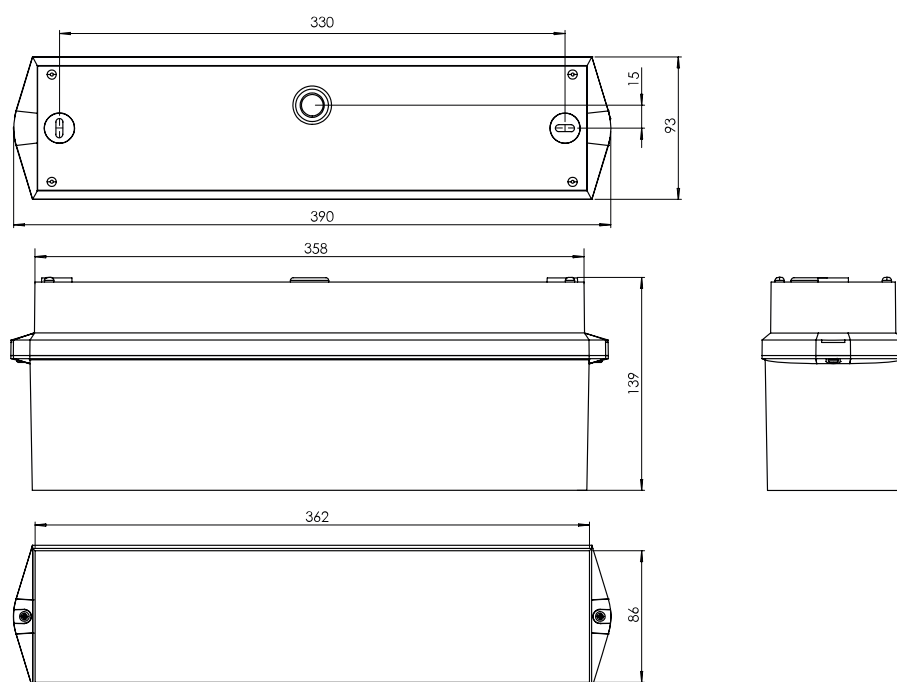

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2	3,78	9,81	8,56	7,32	2,88
2,5	3,94	10,44	9,14	7,87	3,01
3	4,01	10,89	9,57	8,26	3,06
3,5	4	11,19	9,85	8,51	3,02
4	3,9	11,38	10,01	8,64	2,9
5	3,37	11,36	9,96	8,55	2,34
6	1,65	10,85	9,41	7,96	0,57

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 8h

					
2,00	2,45	6,79	6,02	5,2	1,89
2,50	2,37	7,01	6,21	5,36	1,79
3,00	2,12	7,02	6,2	5,33	1,53
3,50	1,54	6,83	5,99	5,1	0,97

Tabela artikla

OPIS	KAT. BROJ
KWI sigurnosna svj. 4x1W ERT-LED, 3h, 230V, stropna mont. TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm	NLKWIDT33S
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. lijevo, desno, gore i dolje	NLKWIPIKTO
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV