

Tehnički list za artikl: NLKWIDT33W

KWI sigurnosna svj. 4x1W ERT-LED, 3h, 230V, WL, stropna, TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 520lm, WirelessControl Professional type




Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	139,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Plastične svjetiljke

Tehnički podaci - nastavak

Dizajn	KWI
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Set samoljepljivih piktograma sadržan u isporuci (strelice: lijevo, desno, gore, dolje) prema ISO 7010
Područje detekcije (m)	16
Vrijeme autonomije (h)	3
Rasvjetno tijelo	ERT-LED (4W)
Lumen	520
Područje napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

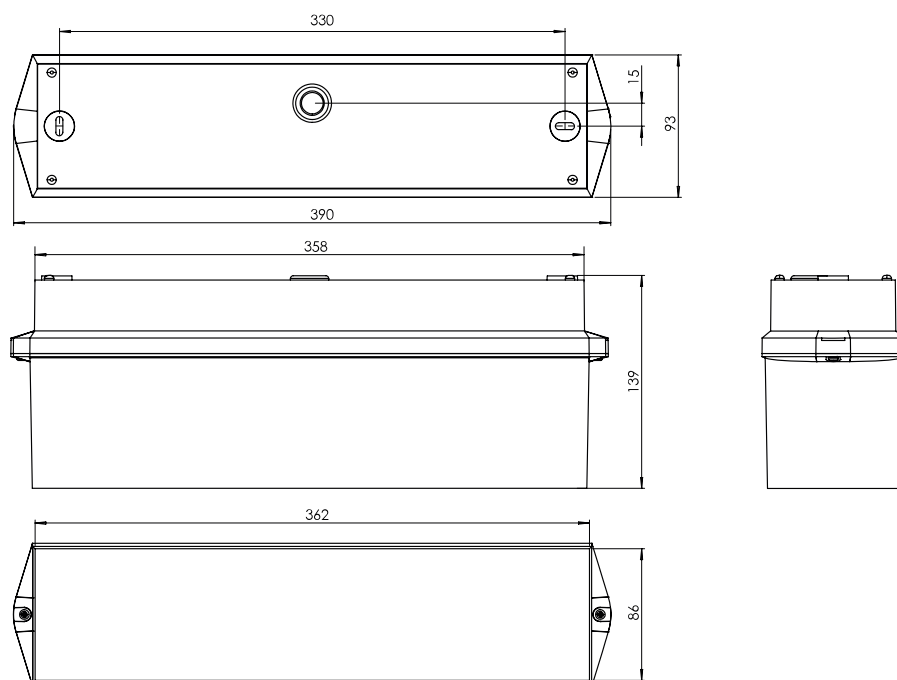

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,82	9,94	8,29	6,56	2,53
2,50	3,94	10,5	8,78	6,99	2,6
3,00	3,97	10,88	9,1	7,25	2,57
3,50	3,89	11,11	9,28	7,36	2,44
4,00	3,71	11,2	9,32	7,34	2,19
5,00	2,76	10,95	8,97	6,87	0,94

Spacing table without lenses - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,78	9,81	8,56	7,32	2,88
2,50	3,94	10,44	9,14	7,87	3,01
3,00	4,01	10,89	9,57	8,26	3,06
3,50	4	11,19	9,85	8,51	3,02
4,00	3,9	11,38	10,01	8,64	2,9
5,00	3,37	11,36	9,96	8,55	2,34
6,00	1,65	10,85	9,41	7,96	0,57

Tabela artikla

OPIS	KAT. BROJ
KWI sigurnosna svj. 4x1W ERT-LED, 3h, 230V, WL, stropna, TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 520lm, WirelessControl Professional type	NLKWIDT33W
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. Lijevo, desno, gore i dolje	NLKWIPKTO
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW	NLAKKU323T
LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV