


Tehnički list za artikl: NLKWIW539C

Emergency luminaire KWI 4x1W ERT-LED 24V CC24, wall mounting

with supervision - centrally switchable, wall surface mounting with pictogram on one side or ceiling surface mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 520lm



Tehnički podaci

Neto duljina (mm)	390,00
Neto širina (mm)	93,00
Neto visina (mm)	99,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta Sigurnosna svjetiljka Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Plastične svjetiljke
Dizajn	KWI

Tehnički podaci - nastavak

Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje detekcije (m)	16
Rasvjetno tijelo	ERT-LED (4W)
Lumen	520
Područje napona (V)	24V AC
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna nadgradna Zidna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

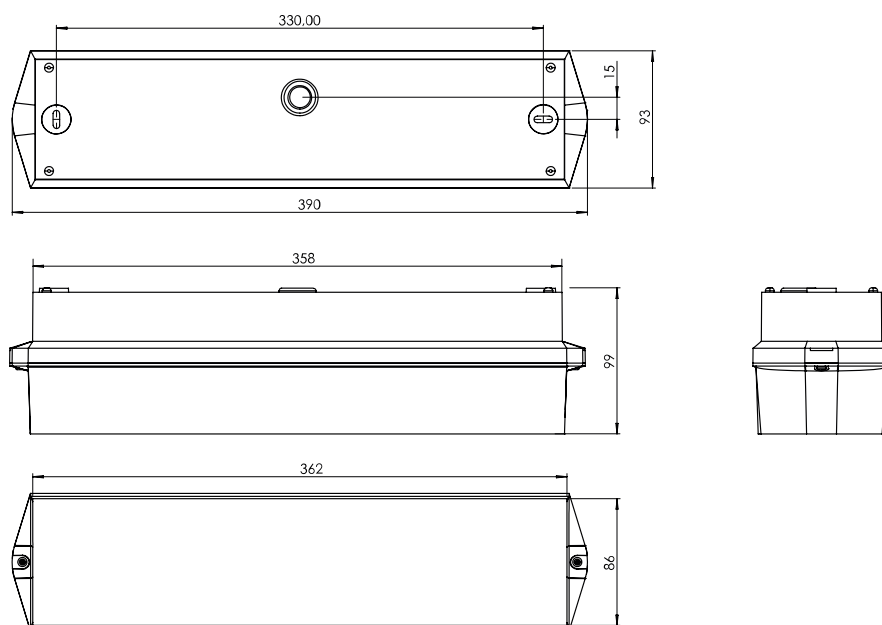


Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire KWI 4x1W ERT-LED 24V CC24, wall mounting with supervision - centrally switchable, wall surface mounting with pictogram on one side or ceiling surface mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 520lm	NLKWIW539C
Dodatni pribor	
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKWI.. Lijevo, desno, gore i dolje	NLKWIPKTO
Par cijevnih nosača 500mm, bijeli, montaža strop	NL2PW
Zidni nosač, bijeli, predviđen za: KB,KX,KW,KCD,KE,GX,RX	NLAWX001