


Tehnički list za artikl: NLKWW003SC

Panik svjetiljka KW Autotest LED3W/3h, montaža zid


1h/3h/8h adjustable, suitable for wall mounting with pictogram on one side, viewing distance: 16m

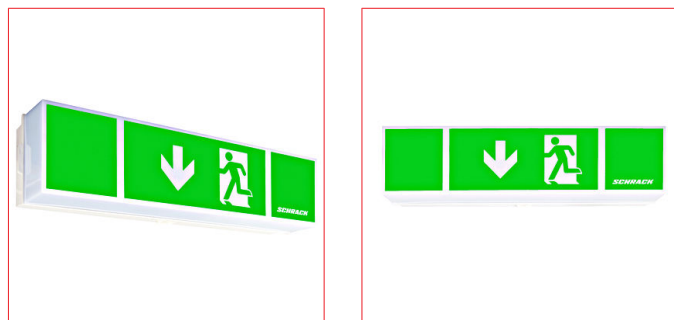

Tehnički podaci

Neto duljina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	85,00
Neto masa (kg)	1,30
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	Samokontrola
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16
Vrijeme autonomije (h)	3
Rasvjetno tijelo	HP-LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Područje napona (V)	230V AC 50Hz ±20%
Baterija (V/Ah)	9,6/2,0 NiMh
IP stupanj zaštite	IP54
Način montaže	Zidna nadgradna
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

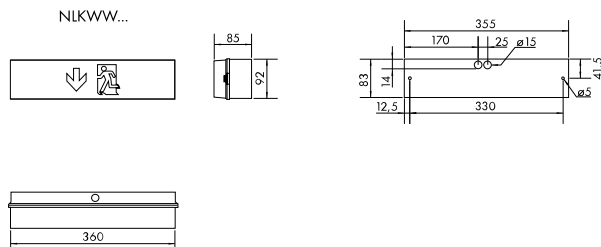

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	2,75	7,27	6,93	6,57	2,56
2,50	2,88	7,73	7,39	7,04	2,59
3,00	2,80	8,03	7,69	7,35	2,61
3,50	2,73	8,19	7,85	7,51	2,54
4,00	2,50	8,21	7,88	7,55	2,31

Tabela artikla

OPIS	KAT. BROJ
Panik svjetiljka KW Autotest LED3W/3h, montaža zid 1h/3h/8h adjustable, suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW003SC
Dodatni pribor	
Prozirno kućište za KW zidna montaža	NLKWC
Zaštitna mrežica za panike KW	NLBKW
Komplet piktograma za KW lijevo, desno, dolje	NLKW0103
Niski poklopac za stropnu montažu za KW lampu, opal	NLKW
Baterija 9,6V 2,0Ah za paniku sa ERT-LED autonomije 1h, 3h, 8h Suitable for LPU module	NLAKKU9620