


Tehnički list za artikl: NLKWW009EL

Svjetljika KWW 6x0,5W LED 230V , CPS, montaža zid


with supervision - centrally switchable, suitable for wall mounting with pictogram on one side,
viewing distance: 16m



Tehnički podaci

Neto duljina (mm)	360,00
Neto širina (mm)	92,00
Neto visina (mm)	85,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Plastične svjetiljke
Dizajn	KW
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Područje detekcije (m)	16
Rasvjetno tijelo	LED (3W)
Lumen	300
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP54
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

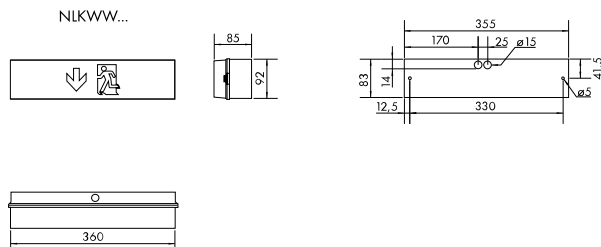

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,75	7,27	6,93	6,57	2,56
2,50	2,88	7,73	7,39	7,04	2,59
3,00	2,80	8,03	7,69	7,35	2,61
3,50	2,73	8,19	7,85	7,51	2,54
4,00	2,50	8,21	7,88	7,55	2,31

Tabela artikla

OPIS	KAT. BROJ
Svjetiljka KWW 6x0,5W LED 230V , CPS, montaža zid with supervision - centrally switchable, suitable for wall mounting with pictogram on one side, viewing distance: 16m	NLKWW009EL
Dodatni pribor	
Prozirno kućište za KW zidna montaža	NLKCW
Zaštitna mrežica za panike KW	NLBKW
Set piktograma za NLKW... Lijevo, desno, gore i dolje	NLKWIPKTO
Niski poklopac za stropnu montažu za KW lampu, opal	NLKWN