

Tehnički list za artikl: NLMMWTA09E

Svjet.design MM LED EL 230AC/DC DUO

antracit zidna

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm



Tehnički podaci


Neto duljina (mm)	236,00
Neto širina (mm)	45,00
Neto visina (mm)	136,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Metalna zaštita od udara
Dizajn	MM
Boja	antracit
Područje detekcije (m)	22

Tehnički podaci - nastavak

Rasvjetno tijelo	LED (2W) ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP40
Udarna čvrstoća	≥ IK03
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

NLMMW...

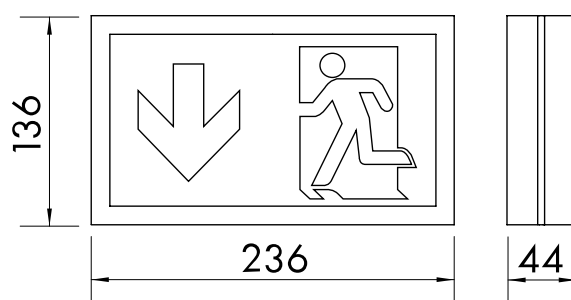

Podatkovna tablica: Svjet.design MM LED EL 230AC/DC DUO antracit zidna

Montagehöhe [m]					
2	1,96	4,87	4,8	4,73	1,91
2,5	2,16	5,31	5,23	5,14	2,09
3	2,32	5,72	5,64	5,56	2,26
3,5	2,44	6,08	5,99	5,89	2,37
4	2,52	6,42	6,34	6,25	2,47
5	2,56	6,92	6,83	6,75	2,52
6	2,33	7,21	7,14	7,07	2,27
7	1,79	7,27	7,2	7,14	1,73
8	0,87	6,96	6,88	6,8	0,84

OPIS

KAT. BROJ

Svjet.design MM LED EL 230AC/DC DUO antracit zidna

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm

NLMMWTA09E