

Tehnički list za artikl: NLMMWTW09E

Svjet.design MM LED EL 230VAC/DC DUO bijela montaža zid

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	45,00
Neto visina (mm)	136,00
Neto masa (kg)	1,15
Vrsta svjetiljke	Kombinirana svjetiljka sa piktogramom i osvjetljenjem evakuacijskog puta
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Metalna zaštita od udara
Dizajn	MM
Boja	bijela
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010

Tehnički podaci - nastavak

Područje detekcije (m)	22
Rasvjetno tijelo	LED (2W) ERT-LED (1W)
Lumen	140
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,90
Power non-maintained mode (W)	1,10
Power max. (W)	3,90
IP stupanj zaštite	IP40
Udarna čvrstoća	≥ IK03
Način montaže	Zidna nadgradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

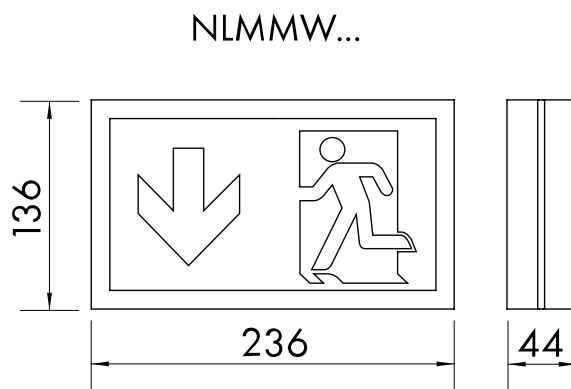

Podatkovna tablica: Svjet.design MM LED EL 230VAC/DC DUO bijela montaža zid

Montagehöhe [m]					
2	1,96	4,87	4,8	4,73	1,91
2,5	2,16	5,31	5,23	5,14	2,09
3	2,32	5,72	5,64	5,56	2,26
3,5	2,44	6,08	5,99	5,89	2,37
4	2,52	6,42	6,34	6,25	2,47
5	2,56	6,92	6,83	6,75	2,52
6	2,33	7,21	7,14	7,07	2,27
7	1,79	7,27	7,2	7,14	1,73
8	0,87	6,96	6,88	6,8	0,84

OPIS	KAT. BROJ
Svjet.design MM LED EL 230VAC/DC DUO bijela montaža zid	
Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLMMWTW09E