

Tehnički list za artikl: NLOMCS009M

Panik svjetiljka OM OLED 230V AC/DC ML, jednostrana, stropna

Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m



Tehnički podaci

Neto duljina (mm)	222,00
Neto visina (mm)	127,00
Neto dubina (mm)	40,00
Neto masa (kg)	0,20
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	Sa centralnim nadzorom
Izvedba/tip	Plosnate svjetiljke
Dizajn	OM
Bezhalogena	Plastično kućište, bez halogena
Boja	eloksirani aluminij
Područje detekcije (m)	20
Rasvjetno tijelo	OLED
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stupanj zaštite	IP20
Način montaže	Ovjesna ugradna
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Class E 8101	AA5

Dimensions (mm)

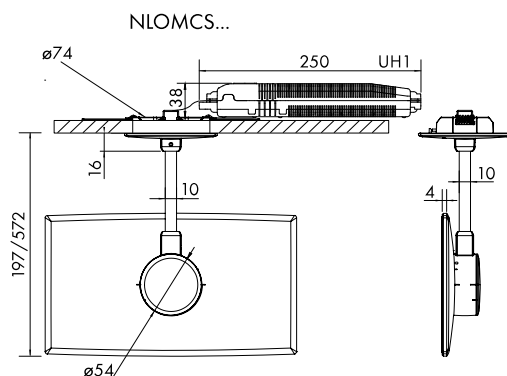


Tabela artikla

OPIS	KAT. BROJ
Panik svjetiljka OM OLED 230V AC/DC ML, jednostrana, stropna Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m	NLOMCS009M
Dodatni pribor	
Ovjes za Design OM 500mm, ožičeni, aluminij može se prema potrebi kratiti	NLOM1PA