

Tehnički list za artikl: NLPMD509CC

Emergency luminaire PM HP-LED CC24 24V ceiling mounting

with supervision - centrally switchable, viewing distance: 20m



Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	168,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Plastične svjetiljke
Dizajn	PM
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje detekcije (m)	20

Tehnički podaci - nastavak

Rasvjetno tijelo	LED (3W)
Područje napona (V)	24V AC
Power maintained mode (W)	2,80
Power non-maintained mode (W)	0,40
Power max. (W)	2,80
IP stupanj zaštite	IP65
Udarna čvrstoća	IK03
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

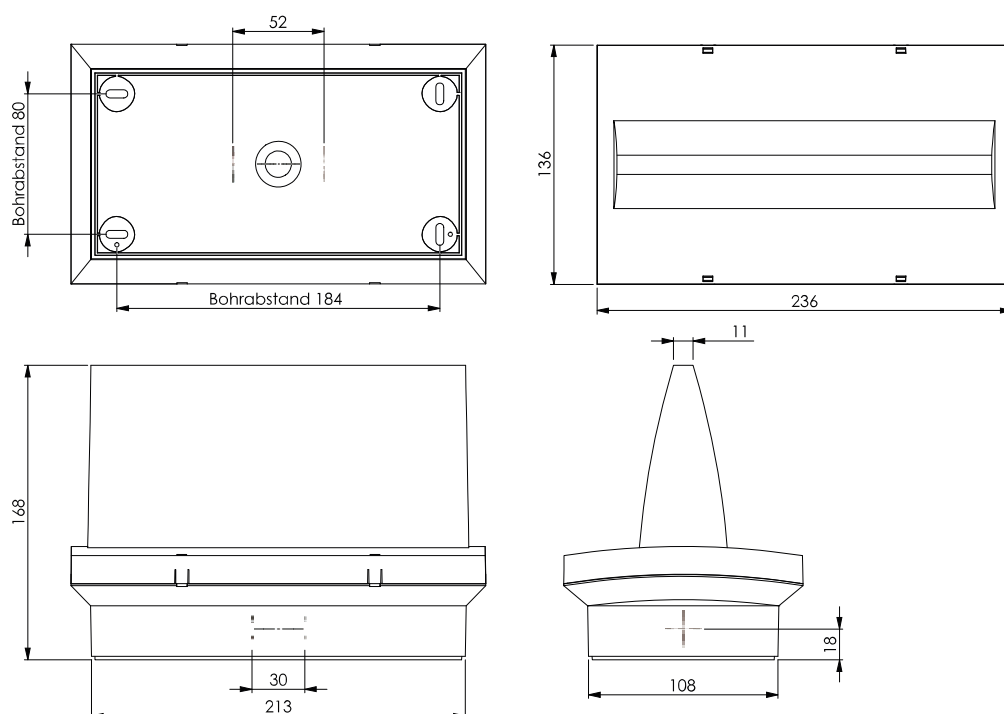


Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire PM HP-LED CC24 24V ceiling mounting with supervision - centrally switchable, viewing distance: 20m	NLPMD509CC
Dodatni pribor	
Ugradni profil za svjetiljke serije PM Required ceiling cut out: 246 x 152 mm	NLPME