

Tehnički list za artikl: NLPMDT03WL

PM sigurnosna svj. LED 3h, WL, 230V, stropna mont, TT

ceiling surface mounting, viewing distance: 20m, radio switchable, LiFePO4 battery suitable for low temperatures -15° to 40°C



Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	168,00
Neto masa (kg)	1,00
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Sa vlastitom baterijom
Funkcija	WirelessControl Low Temperature
Izvedba/tip	Plastične svjetiljke
Dizajn	PM
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010

Tehnički podaci - nastavak

Područje detekcije (m)	20
Vrijeme autonomije (h)	3
Rasvjetno tijelo	LED (3W)
Područje napona (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Baterija (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
IP stupanj zaštite	IP65
Udarna čvrstoća	$\geq IK03$
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-15
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

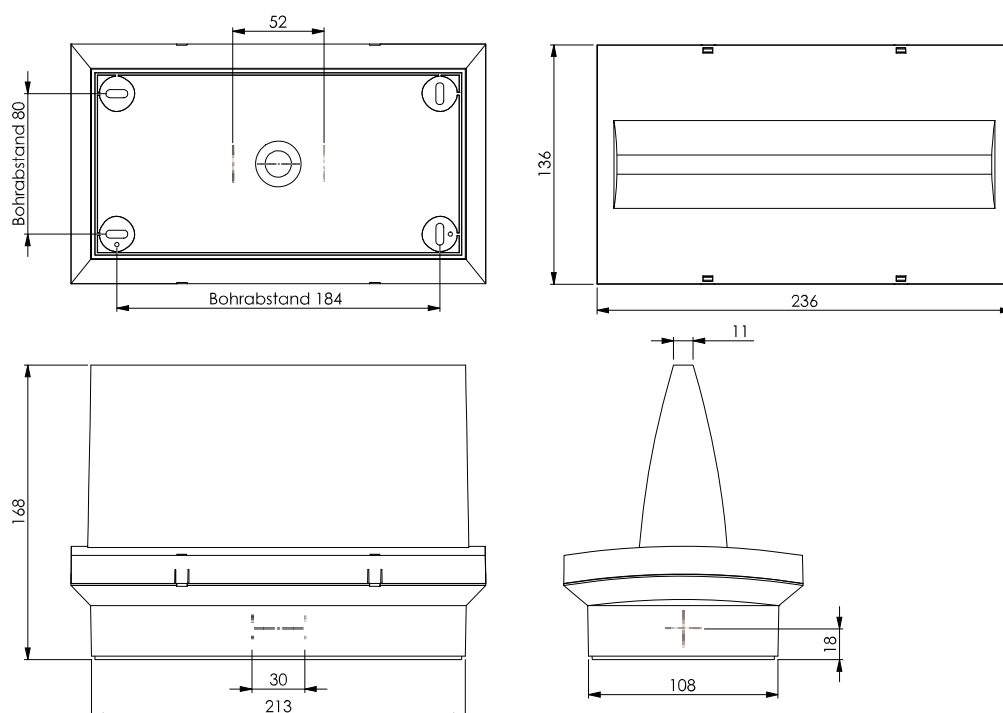


Tabela artikla

OPIS	KAT. BROJ
PM sigurnosna svj. LED 3h, WL, 230V, stropna mont, TT ceiling surface mounting, viewing distance: 20m, radio switchable, LiFePO4 battery suitable for low temperatures -15° to 40°C	NLPMDT03WL
Dodatni pribor	
Ugradni profil za svjetiljke serije PM Required ceiling cut out: 246 x 152 mm	NLPME
Baterija LiFePO4 3,2V 3,2Ah za svjetiljke KM,KSC,KMB,ASM,ZAW LiFePO4 baterija prikladna za niže temperature, UN3480 - UN 3480 : Lithium-Ion batteries, od -25° do 40°C	NLAKKU323T
	NLTESTSC2
Zaštitni poklopac za testne tipke NLTEST2	NLTEST2COV