

Tehnički list za artikl: NLPMW539CC

Emergency luminaire PM 4x1W ERT-LED 24V ceiling mounting

with supervision - centrally switchable, viewing distance: 20m, 520lm




Tehnički podaci

Neto duljina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	65,00
Neto masa (kg)	0,70
Vrsta svjetiljke	Sigurnosna svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Plastične svjetiljke
Dizajn	PM
Bezhalogena	Plastično kućište, bez halogena
Boja	RAL 9003 (bijela)
Rasvjetno tijelo	ERT-LED (6W)
Lumen	520
Područje napona (V)	24V AC

Tehnički podaci - nastavak

Power maintained mode (W)	5,10
Power non-maintained mode (W)	0,40
Power max. (W)	5,10
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna ugradna opcija Stropna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA klase E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

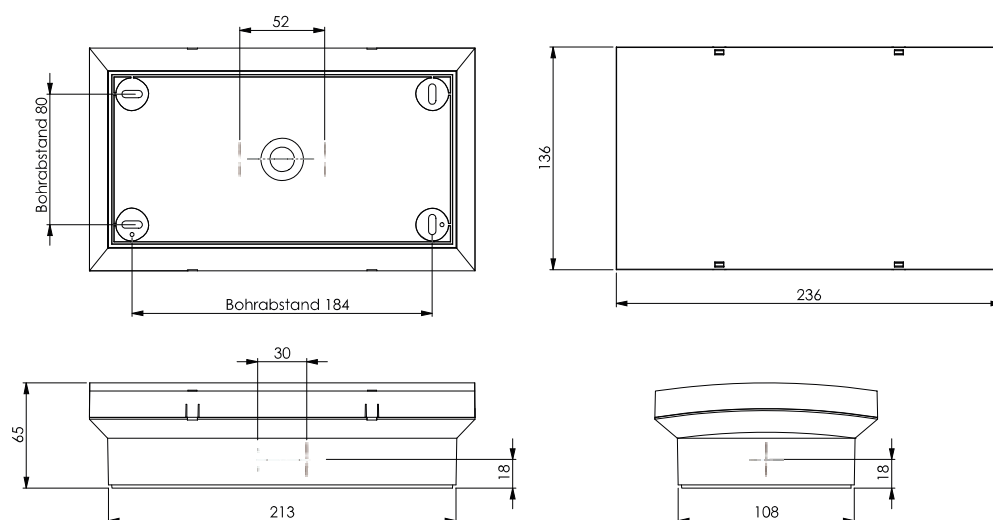

**Abstandstabelle mit Korridorlinsen (im Lieferumfang enthalten) - Min.
Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80**

					
2,00	6,78	15,5	12	8,49	3,32
2,50	7,86	17,94	13,55	9,12	3,52
3,00	8,82	20,27	15,02	9,61	3,65
3,50	9,69	22,41	16,23	9,99	3,72
4,00	10,21	24,37	17,32	10,27	3,77
5,00	11	27,91	19,11	10,61	3,84
6,00	7,52	29,99	19,2	10,81	3,75
7,00	5,33	28,36	16,18	10,91	3,42
8,00	2,62	27,07	13,89	10,83	1,61

Tabela artikla

OPIS	KAT. BROJ
Emergency luminaire PM 4x1W ERT-LED 24V ceiling mounting with supervision - centrally switchable, viewing distance: 20m, 520lm	NLPMW539CC
Dodatni pribor	
Ugradni profil za svjetiljke serije PM Required ceiling cut out: 246 x 152 mm	NLPME