

Tehnički list za artikl: NLPXD509CC

Emergency luminaire PX HP-LED CC24 24V, ceiling mounting

with supervision - centrally switchable, viewing distance: 30m




Tehnički podaci

Neto duljina (mm)	339,00
Neto širina (mm)	73,00
Neto visina (mm)	211,00
Neto masa (kg)	1,37
Vrsta svjetiljke	Panik svjetiljka
VB-CPS	Za centralni panik sustav (CPS)
Funkcija	24V Core24 with supervision- centrally switchable
Izvedba/tip	Plastične svjetiljke
Dizajn	PX
Bezhalogena	Plastično kućište, bez halogena
Boja	bijela
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje detekcije (m)	30

Tehnički podaci - nastavak

Rasvjetno tijelo	LED (3W)
Lumen	335
Područje napona (V)	24V AC
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP stupanj zaštite	IP65
Udarna čvrstoća	IK06
Način montaže	Stropna nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	50
AA klase E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

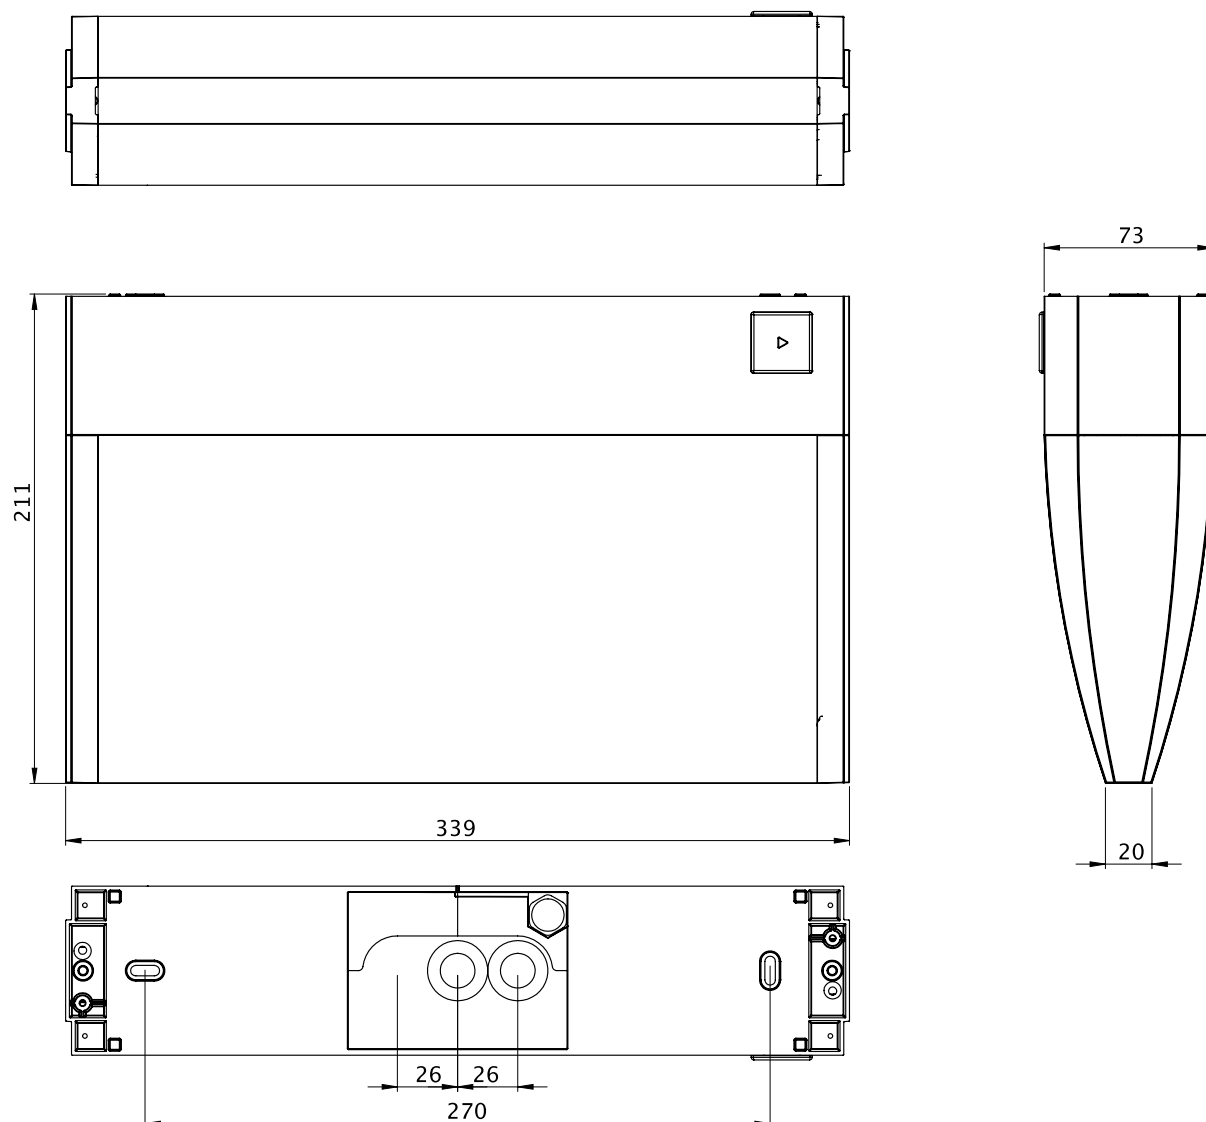

OPIS

Emergency luminaire PX HP-LED CC24 24V, ceiling mounting
with supervision - centrally switchable, viewing distance: 30m

KAT. BROJ

NLPXD509CC